

AVID

WATER SYSTEMS

2024 Catalog



Table Of Contents

Softener Series

PWS1 Series	Page 4-5
PWS1HE Series	Page 6
PWS1CC Series	Page 7
PTS1 Series	Page 8-9
PTS1-HE Series	Page 10-11
SWS1 Series	Page 12-13
SWS1-HE Series	Page 14
SCCWS1 Series	Page 15
NES Series	Page 16-17
NES-HE Series	Page 18-19
INT2 Series	Page 20
NESCC Series	Page 21
N Series	Page 22-23
FE Series	Page 24-25
F Series	Page 26-27

Specialty Softeners

PSX Series	Page 28
PSCF1 Series	Page 29
SCT1 Series	Page 30
SCT1-CHL Series	Page 31

Aeration Filters

POZ1IP Series	Page 32
POZ1 Series	Page 33
PKLX Series	Page 34
PIF1IP Series	Page 35
PIF1DOX Series	Page 36
PIF1 Series	Page 37
O2 Series	Page 38
O2-E Series	Page 39
O3 Series	Page 40
O3-E Series	Page 41
KLX2 Series	Page 42
KLX2-E Series	Page 43

Backwash Filters

SBF1 Series	Page 44
PBF1 Series	Page 45
SCS1 Series	Page 46
PCS1 Series	Page 47
NEB Series	Page 48
FEB Series	Page 49
FB Series	Page 50
CS Series	Page 51



Table Of Contents

Heavy Metals

PMR1 Series.....	Page 52
FEB-Heavy Metal Series	Page 53

Tannin

PTR1 Series	Page 54
FEST Series	Page 55

Nitrates

PNR1 Series	Page 56
FESN Series	Page 57
FSN Series	Page 58

Non-Backwashing Filters

DF Series.....	Page 59
DF Chloramine Series	Page 60
PUN1-DH Series.....	Page 61
UN Series	Page 62

Drinking Water and Whole House

Q1 Series.....	Page 63
QCRO Series.....	Page 64
QCRO-PUMP Series	Page 65
CRS-3 Series.....	Page 66
DWSB-PERM Series	Page 67
DWSB Series.....	Page 68
NRS-1 Series.....	Page 69
HMX-1 Series	Page 70
S500SS Series	Page 71
Filter Booklet.....	Page 72-75
Housing Booklet.....	Page 76-79
Class A UV Series	Page 80-81
Contractor Series UV Systems	Page 82-83

Miscellaneous

Clack Valve Comparison	Page 84
Retention Tank Series	Page 85



- *Cleaner laundry*
- *Sparkling dishes*
- *Plumbing protection*
- *Bottom line savings*
- *Extends the life of water using appliances*
- *Ready out of box to Connect to 1" or 3/4" plumbing*



PWS1 Series water softeners from Avid bring system performance and ease of service to a new level.



- **Mav and Relay Connections.** Valve capable of running no hard water valves, running in sequence, or operating a dosing pump.
- **Modular Design.** Provides quick servicing of the control. No bolts or screws means most repairs can be done without tools.
- **Adjustable Brine Fill Cycle Sequences.** Allows selection of pre-fill or post fill.
- **Push-button Simplicity.** All settings and information retrievable at your fingertips.
- **Adjustable Operation.** Intuitive controller allows for fully adjustable settings.
- **Suspended Backwashing System.** Scrubs iron and turbidity from the resin bed with each regeneration.
- **Non-corrosive Construction.** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.
- **Hefty Brine Tank*.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

* Salt capacity does not apply to space saver or cabinet models.



SPECIFICATIONS PWS1 SERIES

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
PWS1-0948	30,000	24,000	Meter	18	8	1.0	18"	27"	56"	220 lbs	3/4" & 1"
PWS1-1054	45,000	36,000		18	12	1.5	18"	28"	62"		
PWS1-1248	60,000	48,000		23	14	2.0	18"	30"	56"		
PWS1-1354	75,000	60,000		22	18	2.5	18"	31"	62"		
PWS1-1465	90,000	72,000		23	19	3.0	23"	37"	74"		
PWS1-1035	30,000	24,000	Meter Compact	22	8	1.00	16"	23"	43"	120 lbs	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.



Our unique microprocessor based control head monitors system performance, water consumption and more...

- Days since last regeneration
- Gallons since last regeneration
- Reserve based on water usage over last 21 days
- Water flow rates
- Peak flow over last seven days
- Total days since start-up
- Total gallons used since start-up
- Program cycle times

If the power fails, you only need to reset the clock.

All the settings and historical data will remain unchanged.

The Avid PWS1 Series is designed to handle the most demanding household needs. Whether the water is from a municipal source or a private well, the PWS1 Series is highly effective in removing unwanted hardness minerals. Use the PWS1 Series alone or in combination with iron filters or neutralizers to tackle some of the most challenging water problems.

The PWS1 Series gets the job done the first time.

- Models to handle any size household, large or small
- Excellent softening capacity
- Programmable brine fill cycle sequence
- Simplified operator interface
- Built-in memory
- Programmable operation
- Mav and relay connections



Available in a Space-saver model!

Only 12" x 23" of floor space required and 43" in height.



PWS1
Manual



www.avidwatersystems.com

- **Salt & water savings**
- **6 lbs of salt per cubic foot of resin**
- **Superior clearwater iron removal**
- **Less susceptible to fouling by iron**
- **More tolerant of chlorine**
- **Performs better than standard resin in water with elevated TDS**
- **Uses less water per regeneration than a standard water softener!**
- **Ready out of box to connect to 1" or 3/4" plumbing**



A water softener you can feel good about!

Regenerates with only 6 lbs salt per cubic foot. This represents a 33% less salt per regeneration when compared to standard water softeners. Not only do you save substantial dollars, but you reduce the hassle of carrying salt.

PWS1-HE water softeners utilize a revolutionary new resin that has higher kinetics resulting in less salt usage, greater softening capacity, better iron removal, and is more tolerant of chlorine.

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
PWS1-0948-HE	31,000	22,000	Meter	18	8	1.0	18"	27"	56"	220 lbs	3/4" & 1"
PWS1-1054-HE	46,500	33,000		18	12	1.5	18"	28"	62"		
PWS1-1248-HE	62,000	44,000		23	14	2.0	18"	30"	56"		
PWS1-1354-HE	77,500	55,000		22	18	2.5	18"	31"	62"		
PWS1-1465-HE	93,000	66,000		23	19	3.0	23"	37"	74"	600 lbs	
PWS1-1035-HE	31,000	22,000	Meter (space saver)	22	8	1.0	16"	23"	43"	120 lbs	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.



- *Small Footprint*
- *Attractive Style*
- *Provides luxurious, soft water*
- *Meter Initiated*
- *Bypass Valve*
- *Built-in Carry Handles For Convenience*

Powerful and Compact!

The PWS1CC Compact Cabinet Series is ideal where space is limited. These compact units maintain many of the same features used on the larger two tanks system, but does so with a much smaller footprint. This combined unit is easy to install, maintain and service.



Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Pipe Size
	Max.	Std.		Peak	Service	D	W	H	
PWS1CC1035	30,000	24,000	Meter	22	8	24"	12"	45"	3/4" & 1"
PWS1CC1044	39,000	32,000		19	10	24"	12"	50"	



- *Twin tanks provide continuous soft water*
- *15% savings in both water and salt*
- *Only pennies per day to operate*

Water Softening Process:

Hard water enters the tank in service. As it passes through the resin, the hard water ions are attracted to the resin. By the time the water gets to the bottom of the tank, it's soft.

Regeneration Process:

When the resin becomes saturated with hard water ions, the tank goes into regeneration. Brine water is injected into the tank and rinses the hard water ions off the resin and down the drain. Once the resin is free of the hard water ions, fresh, soft water rinses all the brine out, leaving the tank ready for service.

Twin tanks provide continuous soft water:


With the Avid electronic twin-tank softener system businesses benefit from soft water 24 hours a day, seven days a week. Should your demand for soft water suddenly spike - for instance, from unexpected demand - the second tank of softened water is there as a backup, with an innovative quick connection for seamless switching between the tanks. Why is soft water so critical to businesses in the first place? Hard minerals in the water can clog plumbing lines, negatively affecting product taste and/or performance. Without soft water more soap and other additives are required to achieve desired results, and stains and mineral residue are common.



PTS1 SERIES

PTS1 Specifications

Model Number	Grain Capacity (per tank)		Type of Regeneration	Flow Rate (gpm)				Pipe Size
	Max.	Std.		Min.	Service	Peak	Backwash	
PTS1-0948	30,000	24,000	Meter	0.25	8	18	2.2	3/4" & 1
PTS1-1054	45,000	36,000		0.25	12	18	2.7	
PTS1-1248	60,000	48,000		0.25	14	23	3.2	
PTS1-1354	75,000	60,000		0.25	18	22	4.2	
PTS1-1465	90,000	72,000		0.25	19	23	5.3	

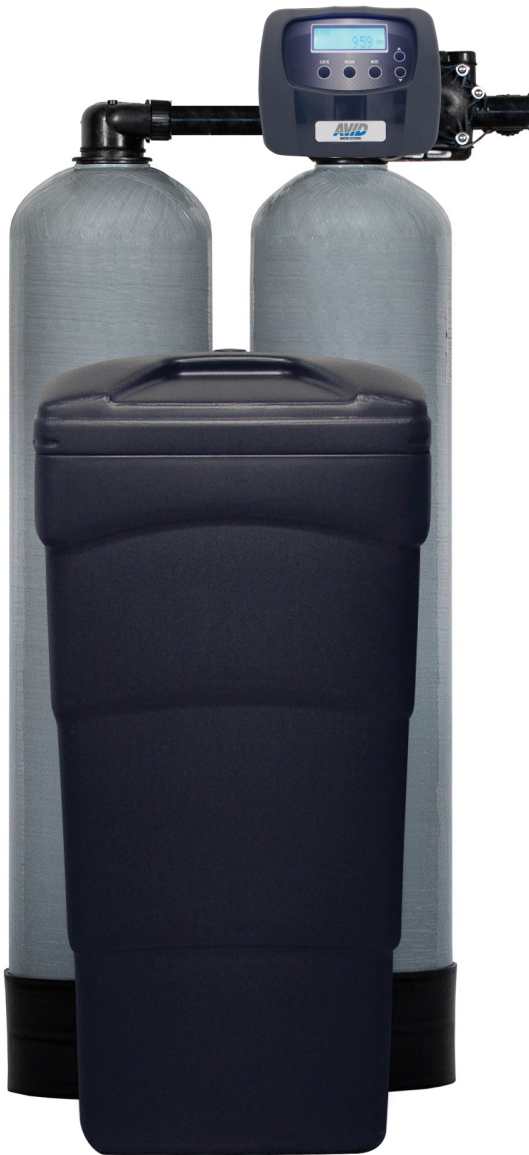

Dimensions				
Model Number	Overall Dimensions			Brine Tank H x W
	D	W	H	
PTS1-0948	18"	48"	56"	18" x 33"
PTS1-1054	18"	49"	62"	18" x 33"
PTS1-1248	18"	51"	56"	18" x 33"
PTS1-1354	18"	53"	62"	18" x 33"
PTS1-1465	23"	62"	74"	23" x 42"



PTS1
Manual

www.avidwatersystems.com



- **15% savings in both water and salt**
- **6 lbs of salt per cubic foot of resin**
- **Superior clearwater iron removal**
- **Less susceptible to fouling by iron**
- **More tolerant of chlorine**
- **Performs better than standard resin in water with elevated TDS**
- **Uses less water per regeneration than a standard water softener!**
- **Ready out of box to connect to 1" or 3/4" plumbing**



Twin tanks provide continuous soft water:

With the Avid electronic twin-tank softener system businesses/homes benefit from soft water 24 hours a day, seven days a week. Should your demand for soft water suddenly spike - for instance, from unexpected demand - the second tank of softened water is there as a backup, with an innovative quick connection for seamless switching between the tanks.

A water softener you can feel good about!

PTS1-HE water softeners utilize a revolutionary new resin that has higher cross linkage resulting in less salt usage, greater softening capacity, better iron removal, and is more tolerant of chlorine.



PTS1-HE SERIES

PTS1-HE Specifications

Model Number	Grain Capacity (per tank)		Type of Regeneration	Flow Rate (gpm)				Pipe Size
	Max.	Std.		Min.	Service	Peak	Backwash	
PTS1-0948-HE	31,000	22,000	Meter	0.25	8	18	2.2	3/4" & 1"
PTS1-1054-HE	46,500	33,000		0.25	12	22	2.7	
PTS1-1248-HE	62,000	44,000		0.25	16	24	3.2	
PTS1-1354-HE	93,000	55,000		0.25	20	25	4.2	
PTS1-1465-HE	93,000	66,000		0.25	21	28	5.3	



Dimensions				
Model Number	Overall Dimensions			Brine Tank H x W
	D	W	H	
PTS1-0948-HE	18"	48"	56"	18" x 33"
PTS1-1054-HE	18"	49"	62"	18" x 33"
PTS1-1248-HE	18"	51"	56"	18" x 33"
PTS1-1354-HE	18"	53"	62"	18" x 33"
PTS1-1465-HE	23"	62"	74"	23" x 42"



PTS1-HE
Manual

www.avidwatersystems.com



- *Cleaner laundry*
- *Sparkling dishes*
- *Plumbing protection*
- *Bottom line savings*
- *Extends the life of water using appliances*
- *Ready out of box to Connect to 1" or 3/4" plumbing*



SWS1 Series water softeners from Avid bring system performance and ease of service to a new level.



- **Modular Design.** Provides quick servicing of the control. No bolts or screws means most repairs can be done without tools.
- **Adjustable Brine Fill Cycle Sequences.** Allows selection of pre-fill or post fill.
- **Push-button Simplicity.** All settings and information retrievable at your fingertips.
- **Adjustable Operation.** Allow the flexibility to maximize salt efficiency and conserve water usage.
- **Suspended Backwashing System.** Scrubs iron and turbidity from the resin bed with each regeneration.
- **Non-corrosive Construction.** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.
- **Hefty Brine Tank*.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

* Salt capacity does not apply to space saver or cabinet models.



SPECIFICATIONS

SWS1 SERIES

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
SWS1-0948	30,000	24,000	Meter	18	8	1.0	18"	27"	56"	220 lbs	3/4" & 1"
SWS1-1054	45,000	36,000		18	12	1.5	18"	28"	62"		
SWS1-1248	60,000	48,000		23	14	2.0	18"	30"	56"		
SWS1-1354	75,000	60,000		22	18	2.5	18"	31"	62"		
SWS1C-1035	30,000	24,000	Meter Compact	22	8	1.0	16"	23"	43"	120 lbs	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.



Our unique microprocessor based control head monitors system performance, water consumption and more...

- Days since last regeneration
- Gallons since last regeneration
- Reserve based on water usage over last 21 days
- Water flow rates
- Peak flow over last seven days
- Total days since start-up
- Total gallons used since start-up
- Program cycle times

If the power fails, you only need to reset the clock.

All the settings and historical data will remain unchanged.

The Avid SWS1 Series is designed to handle the most demanding household needs. Whether the water is from a municipal source or a private well, the SWS1 Series is highly effective in removing unwanted hardness minerals. Use the SWS1 Series alone or in combination with iron filters or neutralizers to tackle some of the most challenging water problems.

The SWS1 Series gets the job done the first time.

- Models to handle any size household, large or small
- Excellent softening capacity
- Programmable brine fill cycle sequence
- Simplified operator interface
- Built-in memory
- Programmable operation



Available in a Space-saver model!

Only 12" x 23" of floor space required and 43" in height.



SWS1
Manual



www.avidwatersystems.com

- **Salt & water savings**
- **6 lbs of salt per cubic foot of resin**
- **Superior clearwater iron removal**
- **Less susceptible to fouling by iron**
- **More tolerant of chlorine**
- **Performs better than standard resin in water with elevated TDS**
- **Uses less water per regeneration than a standard water softener!**
- **Ready out of box to connect to 1" or 3/4" plumbing**



A water softener you can feel good about!

Regenerates with only 6 lbs salt per cubic foot. This represents a 33% less salt per regeneration when compared to standard water softeners. Not only do you save substantial dollars, but you reduce the hassle of carrying salt.

SWS1-HE water softeners utilize a revolutionary new resin that has higher kinetics resulting in less salt usage, greater softening capacity, better iron removal, and is more tolerant of chlorine.

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
SWS1-0948-HE	31,000	22,000	Meter	18	8	1.0	18"	27"	56"	220 lbs	3/4" & 1"
SWS1-1054-HE	46,500	33,000		18	12	1.5	18"	28"	62"		
SWS1-1248-HE	62,000	44,000		23	14	2.0	18"	30"	56"		
SWS1-1354-HE	77,500	55,000		22	18	2.5	18"	31"	62"		
SWS1C-1035-HE	31,000	22,000	Compact	21	8	1.0	16"	23"	43"	120 lbs	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.



- *Small Footprint*
- *Attractive Style*
- *Provides luxurious, soft water*
- *Meter Initiated*
- *Bypass Valve*
- *Built-in Carry Handles For Convenience*

Powerful and Compact!

The SCCWS1 Compact Cabinet Series is ideal where space is limited. These compact units maintain many of the same features used on the larger two tanks system, but does so with a much smaller footprint. This combined unit is easy to install, maintain and service.



Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Pipe Size
	Max.	Std.		Peak	Service	D	W	H	
SCCWS1-1035	30,000	24,000	Meter	22	8	24"	12"	45"	3/4" & 1"
SCCWS1-1044	39,000	32,000		19	10	24"	12"	50"	





- **Loaded With Features**
- **Easy to Install...Easy To Service.**

Easy To Program. Just push the button to set the time of day and hardness.

Safety Brine Valve. Eliminates messy overflow should a malfunction occur.

Optional Advanced Programming. Adjustment of each cycle duration; regeneration time; and days over-ride.

Salt Shelf. Allows the use of inexpensive salt and reduces the chance of salt bridging and mushing.

Rugged Resin Tank. Fiberglass construction, will never rust or corrode.

Vortex Distributor. Scrubs the resin each regeneration to extend the life of the softener.

Self Leveling Base. Compensates for unlevel floor.

Rugged Valve. Motorized piston for years of trouble free service.

Quick Release Drain Fitting. No threads to Leak. Merely pull clip to remove drain fitting.

Push-In Brine Line Fitting. Eliminates confusing ferrules and nuts that can cause leaks.

Stainless Steel Bypass. Operate with single handle. 3/4" or 1" female threads.



NES SERIES

SPECIFICATIONS

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
NES-0.75-S	22,500	18,000	14	6	200	52"	45.75"	23"	15"	3/4" or 1"
NES-1-S	30,000	24,000	14	8	200	56"	49.75"	27"	15"	
NES-1-5-S	45,000	36,000	13	10	200	62"	56"	28"	15"	
NES-2-S	60,000	48,000	14	12	200	56"	49.75"	30"	15"	
NES-2-5-S	75,000	60,000	15	14	200	62"	56"	32"	18"	


NOTE: If a 1" bypass is desired change suffix to 1S, example NES-1-1S.

SPACE-MAKER

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
NECS-0.75-S	22,500	18,000	14	6	150	43"	36.50"	23"	13"	3/4" or 1"
NECS-1-S	30,000	24,000	14	8	150	43"	36.50"	23"	13"	3/4" or 1"

NOTE: If a 1" bypass is desired change suffix to 1S, example NECS-1-1S.

NOTE: Service flow rate of control valve (only) is 20gpm @ 15 psig drop.

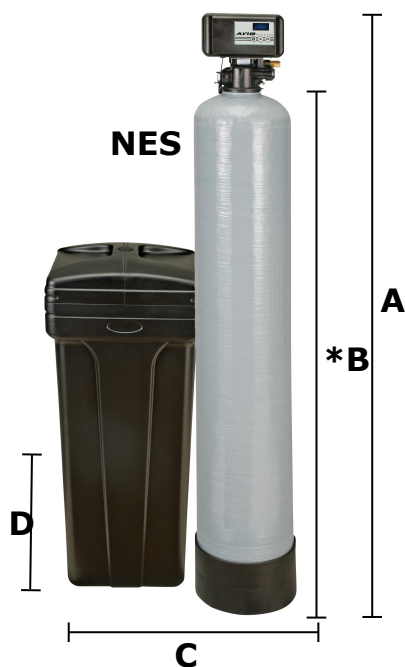

Enjoy all the benefits of soft water: cleaner laundry, sparkling dishes, improved dinning, and cleaner environment.



Softener
Series



NES-HE Series

High Efficiency Water Softeners



- 6 lbs. of salt per cubic foot of resin
- Superior clear-water iron removal
- HE resin is less susceptible to iron fouling
- Performs better than standard resin in water with elevated TDS



NES-HE SERIES

SPECIFICATIONS

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Std.	Peak	Service		A	*B	C	D	
NES-1-S-HE	31,000	22,000	14	8	160	56"	49.75"	24"	15"	3/4" or 1"
NES-1-5-S-HE	46,500	33,000	15	12	160	62"	56"	25"	15"	
NES-2-S-HE	62,000	44,000	16	13	220	56"	49.75"	30"	18"	


NOTE: If a 1" bypass is desired change suffix to 1S, example NES-1-1S-HE.

SPACE-MAKER

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Std.	Peak	Service		A	*B	C	D	
NECS-1-S-HE	32,000	24,000	14	8	120	43"	36.50"	22"	13"	3/4" or 1"

NOTE: If a 1" bypass is desired change suffix to 1S, example NECS-1-1S-HE.

NOTE: Service flow rate of control valve (only) is 20gpm @ 15 psig drop.

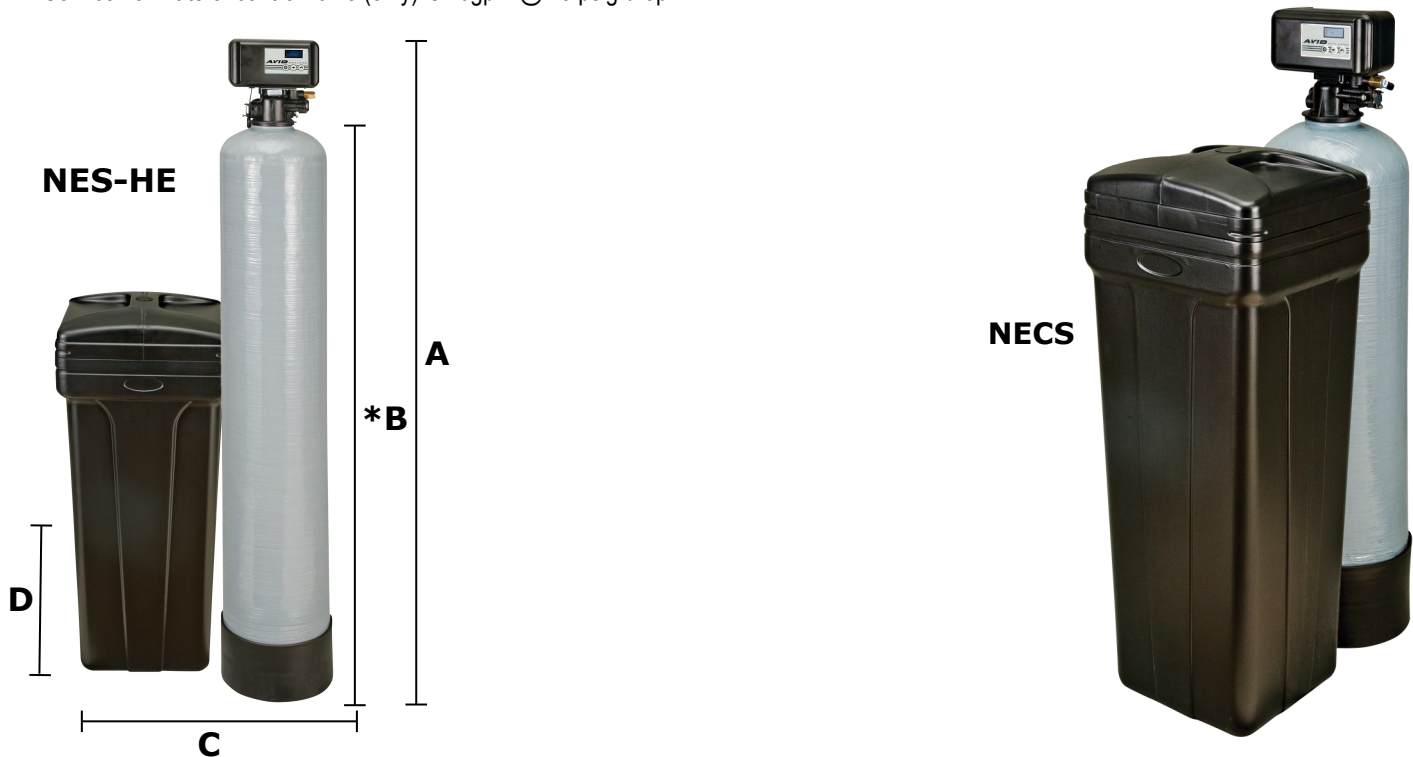

Enjoy all the benefits of soft water: cleaner laundry, sparkling dishes, improved dinning, and cleaner environment.



NES-HE
Manual



www.avidwatersystems.com

- Can be programmed to use as little as 4 lbs of salt per regeneration.
- Only 43 gallons of water used per regeneration.
- Effectively reduces clear water iron.
- Extremely small footprint. Fits where other water softeners won't.



Although this is a two tank system it is 20 square inches smaller than a typical cabinet one piece water softener. The two tanks can be separated by up to 15 feet. The salt storage tank can be located on either side of the resin tank or directly in front of it.



Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Std.	Peak	Service		A	*B	C	D	
INT2-S	30,000	24,000	14	8	120	44"	36.50"	13"	28"	3/4" or 1"

Replace "-S" suffix with "-1S" for 1" bypass.



- *Small Footprint*
- *Attractive Style*
- *Provides luxurious, soft water*
- *Meter Initiated*
- *Stainless Steel Bypass Valve*



Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Dimensions		
	Max.	Std.		Peak	Service	W	H	D
NESCC-1-S	30,000	24,000	Meter/ Time Clock	14	8	12"	45"	24"
NESCC-1.3-S	40,000	30,000		15	10	12"	50"	24"



- **Bottom Line Savings**
- **Cleaner Laundry**
- **Protects Plumbing**
- **Sparkling Dishes**
- **Affordable**



N & NMS Series water softeners from Avid are designed to effectively treat most common hard water problems found in either municipal or well water sources. The N & NMS Series models are affordable and efficient to operate in removing unwanted hardness and minerals from your household water.

- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Heavy-Duty Brine Maker.** Large salt capacity minimizes frequency of salt refill.
- **Meter Regeneration.** Monitors water usage and initiates regeneration according to the water volume consumed.
- **Rugged Motorized Piston Control Valve.** Provides years of dependable service. Can be programmed to handle severe hardness, yet provide maximum salt efficiency.
- **Safety Brine Valve.** Prevents messy overflow of brine tank during power outage or system malfunction.
- **Salt Support Platform.** Allows the use of any type of water softener salt. Minimizes “salt mushing” and necessity of frequent cleaning.

N & NMS Series

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Overall Height (Inches)	Salt Storage (lbs.)	Pipe Size
	Max.	Std.		Peak	Cont.			
N-0.75-S	22,500	18,000	Time Clock	12	6	52"	160	3/4" or 1"
N-1-S	30,000	24,000		13	8	56"	160	
N-1.5-S	45,000	36,000		13	10	62"	160	
N-2-S	60,000	48,000		14	12	56"	220	
N-2.5-S	75,000	60,000		15	14	62"	220	
NMS-0.75-S	22,500	18,000	Metered	12	6	52"	160	
NMS-1-S	30,000	24,000		13	8	56"	160	
NMS-1.5-S	45,000	36,000		13	10	62"	160	
NMS-2-S	60,000	48,000		14	12	56"	220	
NMS-2.5-S	75,000	60,000		15	14	62'	220	

Replace “-S” suffix with “-1S” for 1” bypass.



NC & NMCS Space Saver Series water softeners provide full performance in a compact size.

- **Small Footprint.** The dimensions of this unit is only 13" x 22" x 43".
- **Loaded with Features.** All the same benefits as the standard N & NMS Series.
- **Optional Meter Regeneration.** Monitors water usage and initiates regeneration according to the water volume consumed.
- **Rugged Motorized Piston Control Valve.** Provides years of dependable service. Can be programmed to handle severe hardness, yet provide maximum salt efficiency.
- **Safety Brine Valve.** Prevents messy overflow of brine tank during power outage or system malfunction.

NC & NMCS Space-Maker

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Overall Height (Inches)	Salt Storage (lbs.)	Pipe Size
	Max.	Min.		Peak	Cont.			
NC-1-S	30,000	24,000	Time Clock	13	8	43"	120	3/4" or 1"
NMCS-1-S	30,000	24,000	Metered	13	8	43"	120	

Replace "-S" suffix with "-1S" for 1" bypass.



- *Cleaner laundry*
- *Sparkling dishes*
- *Plumbing protection*
- *Bottom line savings*
- *Extends the life of water using appliances*



FE Series meter initiated water softeners from AVID bring system performance and ease of service to a new level.



- **Push-button Simplicity.** All settings and information retrievable at your fingertips.
- **Backlight Display.** Easy to read in dark areas.
- **Adjustable Regeneration Cycle Sequences.** Programming can be adjusted to handle your exact water conditions.
- **Adjustable Regeneration Cycle Durations.** Allow the flexibility to maximize salt efficiency and conserve water usage.
- **Vortex Backwash System.** Scrubs iron and turbidity from the resin bed with each regeneration.
- **Non-corrosive Construction.** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Hefty Brine Tank.** Large, 200 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.
- **Stainless Steel Bypass Valve.** Easy to use. Available in 3/4" or 1".




SPECIFICATIONS

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
FE0844	22,500	18,000	13	6	200	54"	42-1/2"	24"	16"	3/4" or 1" (-1S suffix)
FE0948	30,000	24,000	14	8	200	57"	50-1/2"	26"	16"	
FE1054	45,000	36,500	14	12	200	64"	56-1/2"	26"	16"	
FE1248	60,000	48,000	16	13	200	58"	50-1/2"	28"	16"	
FE1354	75,000	60,000	16	14	200	64"	56-1/2"	29"	16"	
FE1465	90,000	72,000	17	15	600	77"	69-3/4"	39"	25"	

SPACE-MAKER

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Min.	Peak	Service		A	*B	C	D	
FEC0835	22,500	18,000	16	6	150	44"	37-1/2"	23"	15"	3/4"
FEC1035	30,000	24,000	16	8	150	44"	37-1/2"	23"	15"	3/4"

NOTE: Service flow rate of control valve with bypass and meter is 18gpm @ 15 psig drop.

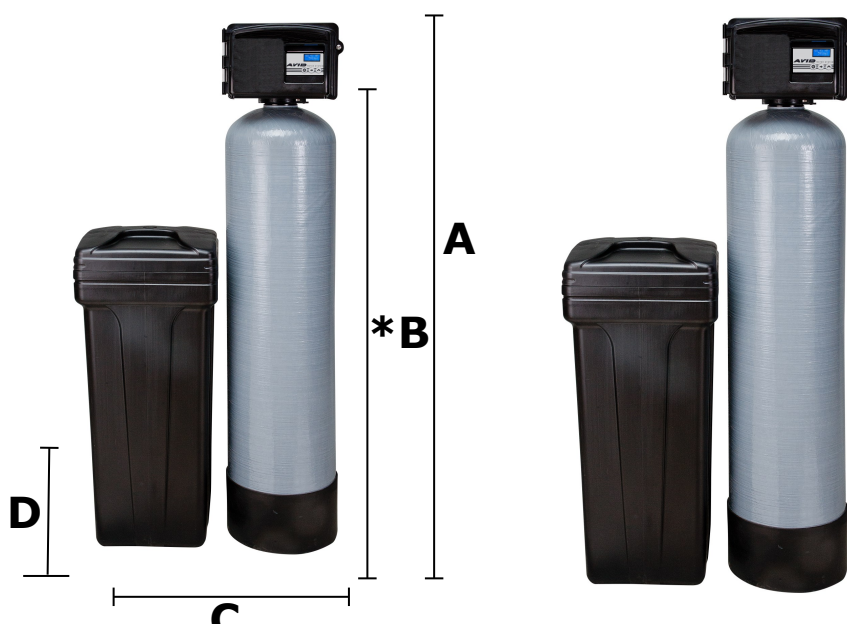

- Bottom Line Savings
- Cleaner Laundry
- Improved Dining
- Plumbing Protection
- Sparkling Dishes



F Series water softeners from Avid are designed to provide years of dependable service. In addition to durability, they are designed to conserve salt and water. For enhanced iron handling, "High Efficiency" models significantly out perform standard systems.

- **Full Flow Bypass Valve.** Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or to provide water if a malfunction occurs.
- **Non-Corrosive Construction.** Components are stainless steel, fiberglass and polyethylene, eliminating rust and corrosion problems.
- **Rugged Motorized Piston Control.** Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale and hardness. Every cycle is programmable, so it can be adjusted to your water condition. The most popular model uses only 43 gallons of water per regeneration. Full, one-inch porting reduces pressure drop.
- **Safety Brine Valve.** Float actuated safety backup prevents messy overflow of brine tank during power outage.
- **Salt Support Platform.** Elevates the salt above the water to prevent salt "mushing" and allows the use of all types of water softener salt.
- **Vortex Backwash System.** Scrubs resin clean of iron and turbidity.

Model Number	Grain Capacity		Type of Regeneration	Service Flow Rate		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak*	Service**		D	W	H		
F0844	22,500	18,000	Time Clock or Meter (FM)	13	6	0.75	14"	23"	53"	300 lbs	3/4" or 1" (-1S Suffix)
F0948	30,000	24,000		14	8	1.00	14"	24"	57"		
F1054	45,000	36,000		14	12	1.50	14"	25"	63"		
F1248	60,000	48,000	Standard Hi Cap Resin	16	13	2.00	14"	27"	57"		
F1354	75,000	60,000		16	14	2.50	18"	28"	63"		
F0844-HE	27,000	20,250	Time Clock or Meter (FM)	16	6	0.75	14"	23"	53"	300 lbs	
F0948-HE	36,000	27,000		17	8	1.00	14"	24"	57"		
F1054-HE	54,000	40,500		17	12	1.50	14"	25"	63"		
F1248-HE	72,000	54,000	High Efficiency Resin	18	15	2.00	14"	27"	57"		
F1354-HE	90,000	67,500		18	15	2.50	18"	28"	63"		

NOTE: High Efficiency resin uses 33% less salt per regeneration & provides superior iron reduction

*≤20 psi loss **8 gpm/ft³ & ≤15 psi loss ***5 gpm/ft³ & ≤15 psi loss



F Space Saver Series water softeners have all the performance features in a compact model.

- **Small Footprint.** The dimensions of this unit is only 12" x 23" x 45".
- **Loaded with Features.** All the same benefits as the standard F Series.
- **Full Flow Bypass Valve.** Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or to provide water if malfunction occurs.
- **Rugged Motorized Piston Control Valve.** Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale, and hardness.
- **Safety Brine Valve.** Prevents messy overflow of brine tank during power outage or system malfunction.



Model Number	Grain Capacity		Type of Regeneration	Service Flow Rate		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak*	Service**		D	W	H		
FC0835	22,500	18,000	Space Saver TC or Mtr (FCM)	16	6	0.75	12"	23"	44"	125 lbs	3/4" or 1" (-1S suffix)
FC1035	30,000	24,000		16	8	1.00	12"	23"	44"		
FC0835-HE	27,000	20,250	High Efficiency Space Saver TC or Mtr (FCM)	18	6	0.75	12"	23"	44"	125 lbs	
FC1035-HE	36,000	27,000		18	8	1.00	12"	23"	44"		

NOTE: High Efficiency resin uses 33% less salt per regeneration & provides superior iron reduction



- *Reduces staining*
- *Sparkling dishes*
- *Bottom line savings*
- *Brighter laundry*
- *Protects plumbing*
- **Automatic Chlorine Generator.** Disinfects the unit and reduces iron and sulfur bacteria each regeneration.
- **Two Units in One.** Removes iron and hardness. Zeolite provides excellent filtration and chlorine resistant resin removes iron and hardness through ion exchange.
- **Adjustable Control.** Programming can be set to handle your water conditions.
- **Non-Corrosive Construction.** All components are made of fiberglass, stainless steel, or similar materials to provide many years of service.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.



Chlorine Generator

Picture may not be exact representation of product.

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Pipe Size
	Max.	Std.		Peak	Service	D	W	H	
PSX1-1054	30,000	24,000	Meter/Time Clock	18	12	18"	28"	62"	3/4" & 1
PSX1-1248	45,000	36,000		23	14	18"	30"	56"	
PSX1-1354	60,000	48,000		22	18	18"	31"	62"	
PSX1-1465	75,000	60,000		23	19	23"	31"	74"	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.



- **Reduces chlorine, taste & odor**
- **Protects softener resin from deterioration by chlorine**
- **Provides luxurious, great tasting soft water**
- **Ready out of box to connect to 1" or 3/4" plumbing**

- **Modular Design.** Provides quick servicing of the control. No bolts or screws means most repairs can be done without tools.
- **One Unit.** Does the job of two pieces of equipment, carbon filter and water softener.
- **Push-button Simplicity.** All settings and information retrievable at your fingertips.
- **Easy to Install.** One control valve to plumb.
- **Non-corrosive Construction.** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.
- **Replacable Carbon Filter.** Top carbon tank can be removed and replaced with fresh carbon.
- **Hefty Brine Tank*.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

* Salt capacity does not apply to space saver or cabinet models.



Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
PSCF1-1035	1.0	2.2	19	8	18"	28"	63"	3/4" & 1"

NOTE: Service flow rate of control valve with bypass and meter is 20gpm @ 15 psig drop.
Actual product color may vary from picture.



- **Reduces chlorine, taste & odor**
- **Protects softener resin from deterioration by chlorine**
- **Provides luxurious, great tasting soft water**



- **One Unit.** Saves space by doing the job of two pieces of equipment. A carbon filter and a water softener.
- **Easy to Install.** One control valve, come ready out of the box to plumb to either 3/4" or 1" piping.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the system for lawn irrigation.
- **Simple Maintenance.** Merely add salt periodically and re-bed the carbon filter if it ever becomes exhausted.
- **Hefty Brine Tank.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
SCT1-0948	30,000	24,000	Meter	18	8	1.0	18"	42"	64"	220 lbs	3/4" & 1"
SCT1-1054	45,000	36,000		18	12	1.5	18"	44"	70"		
SCT1-1248	60,000	48,000		22	16	2.0	18"	48"	64"		
SCT1-1354	75,000	60,000		22	18	2.5	18"	50"	70"		
SCT1C-1035	30,000	24,000	Meter Compact	18	8	1.0	16"	44"	51"	120 lbs	



- **Reduces chlorine, Chloramine, taste & odor**
- **Protects softener resin from deterioration by chlorine**
- **Provides luxurious, great tasting soft water**

SCT1-CHL Series

Catalytic Carbon Filter/Softener



- **Catalytic Carbon.** High capacity carbon that effectively reduces Chlorine, Chloramine and their byproducts.
- **One Unit.** Saves space by doing the job of two pieces of equipment. A carbon filter and a water softener.
- **Easy to Install.** One control valve, come ready out of the box to plumb to either 3/4" or 1" piping.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the system for lawn irrigation.
- **Simple Maintenance.** Merely add salt periodically and re-bed the carbon filter if it ever becomes exhausted.
- **Hefty Brine Tank.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

Model Number	Grain Capacity		Type of Regeneration	Flow Rate (gpm)		Resin Volume	Overall Dimensions			Salt Storage	Pipe Size
	Max.	Std.		Peak	Service		D	W	H		
SCT1-0948-CHL	30,000	24,000	Meter Or Time clock	18	8	1.0	18"	42"	64"	220 lbs	3/4" & 1"
SCT1-1054-CHL	45,000	36,000		18	12	1.5	18"	44"	70"		
SCT1-1248-CHL	60,000	48,000		22	16	2.0	18"	48"	64"		
SCT1-1354-CHL	75,000	60,000		22	18	2.5	18"	50"	70"		
SCT1C-1035-CHL	30,000	24,000	Meter Compact	18	8	1.0	16"	44"	51"	120 lbs	



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Corrects acid water conditions**



- **Ozone Generator.** Converts O₂ to ozone (O₃)
- **Superior Oxidation.** 1.5x stronger than chlorine.
- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.

Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
POZ1-1054-IP	1.0	5.3	10	5	16"	11"	62"	3/4" & 1"
POZ1-1248-IP	1.5	7.5	14	8	16"	13"	56"	
POZ1-1354-IP	2.0	9	17	9	16"	14"	62"	
POZ1-1465-IP	2.5	11	19	11	16"	15"	74"	

NOTE 1: Residential POZ1 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. Flow rates dependent on media selection.

NOTE 2: Add suffix "-DH" if a dome hole is desired. Ex: POZ1-1054-IP-DH





POZ1 Series

Ozone System (less media)



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Ready out of box to connect to 1" or 3/4" plumbing**



- **Ozone Generator.** Converts O₂ to ozone (O₃)
- **Superior Oxidation.** 1.5x stronger than chlorine.
- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.

Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
POZ1-1054	1.0	5.3	10	5	16"	11"	62"	3/4" & 1"
POZ1-1248	1.5	7.5	14	8	16"	13"	56"	
POZ1-1354	2.0	9	17	9	16"	14"	62"	
POZ1-1465	2.5	11	19	11	16"	15"	74"	

NOTE 1: Residential POZ1 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. Flow rates dependent on media selection.

NOTE 2: Add suffix "-DH" if a dome hole is desired. Ex: POZ1-1054-DH



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Ready out of box to connect to 3/4" or 1" plumbing**



- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.
- **Light Weight.** Catalytic filter media weight 66 lb./cu. ft.
- **Reduces.** Sulfur, Manganese, and Iron.

Model Number	Media cu. ft.	Backwash Rate Required (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
PKLX-1054	1.0	6.5 GPM	10	5	16"	15"	62"	3/4" & 1"
PKLX-1248	1.5	9 GPM	14	8	16"	15"	56"	
PKLX-1354	2.0	11 GPM	17	9	16"	15"	62"	
PKLX-1665	3.0	17 GPM	25	14	16"	16"	74"	

NOTE: Add suffix "-DH" if a dome hole is desired. Ex: PKLX-1054-DH



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Corrects acid water conditions**



- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.
- **Automatic pH Adjustment.** Specialty filter media automatically adjusts Ph for iron & manganese reduction.

Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
PIF1-1054-IP	1.0	5.3	10	5	16"	11"	62"	3/4" & 1"
PIF1-1248-IP	1.5	7.5	14	8	16"	13"	56"	
PIF1-1354-IP	2.0	9	17	9	16"	14"	62"	
PIF1-1465-IP	2.5	11	19	11	16"	15"	74"	

NOTE: Add suffix "-DH" if a dome hole is desired. Ex: PIF1-1054-IP-DH



- **Reduces stains**
- **Reduces Iron**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Ready out of box to connect to 1" or 3/4" plumbing**




- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.



Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
PIF1D-1054-OX	1.0	5.3	10	7	16"	28"	71"	3/4" & 1"
PIF1D-1054-15-OX	1.5	5.3	10	7	16"	28"	71"	
PIF1D-1248-OX	2.0	7.5	14	9	17"	30"	65"	
PIF1D-1465-OX	3.0	11	19	11	18"	39"	83"	



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Ready out of box to connect to 1" or 3/4" plumbing**

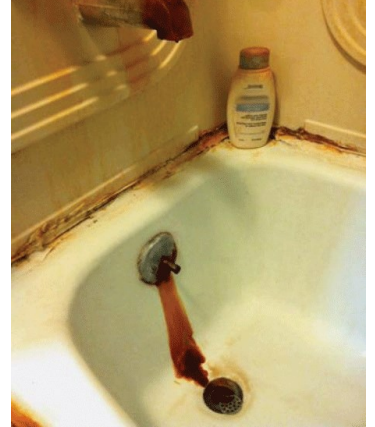



- **Media Separate.** Filter comes less media for installer customization.
- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Easy to use, two handle valve allows you to water the garden or yard with raw water. Large porting prevents pressure drop.

Model Number	Media cu. ft.	Backwash Rate (gpm)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	D	W	H	
PIF1-1054	1.0	5.3	10	5	16"	11"	62"	3/4" & 1"
PIF1-1248	1.5	7.5	14	8	16"	13"	56"	
PIF1-1354	2.0	9	17	9	16"	14"	62"	
PIF1-1465	2.5	11	19	11	16"	15"	74"	

NOTE: Add suffix "-DH" if a dome hole is desired. Ex: PIF1-1054-DH



- **Brighter Laundry**
- **Corrects Acid Water Conditions**
- **Eliminates Odors**
- **Protects Plumbing**
- **Reduces Staining**

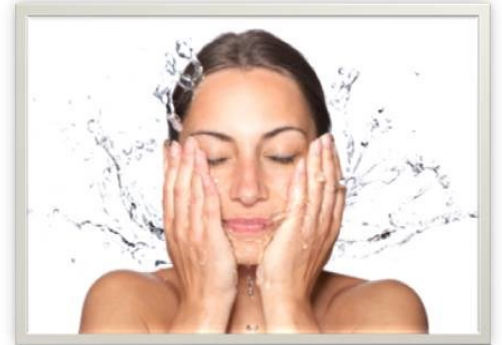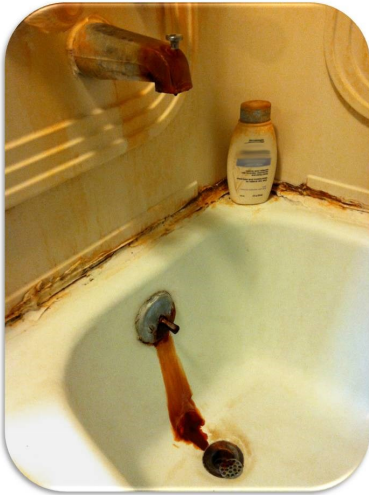

O2 Series Iron Reduction System reduces unwanted iron and stains from the water supply.



- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during maintenance.
- **Less Maintenance.** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7.
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Small Footprint** allows for ease of installation

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Service Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	L	W	H	
O2-1054	1.0	5 GPM	9	5	12"	15"	64"	1"
O2-1354	2.0	7 GPM	15	9	13"	15"	64"	
O2-1054M	1.0	5 GPM	9	5	12"	15"	64"	
O2-1354M	2.0	7 GPM	15	9	13"	15"	64"	

NOTE: Residential O2 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. "M" suffix is used for manganese reduction.



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**

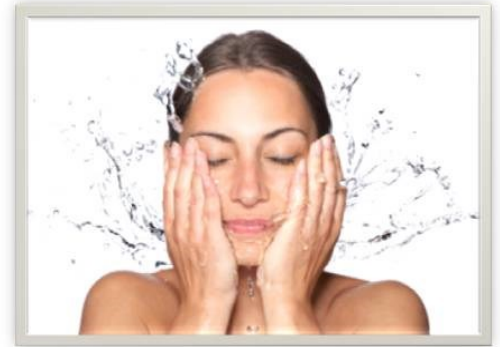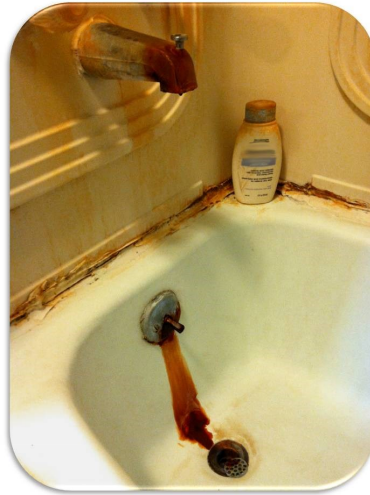

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**

- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.
- **Automatic pH Adjustment.** Specialty filter media automatically adjusts pH for iron & manganese reduction.

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	L	W	H	
O2E-1054	1.0	5 GPM	9	5	12"	15"	64"	1"
O2E-1354	2.0	7 GPM	15	9	13"	15"	64"	
O2E-1054M	1.0	5 GPM	9	5	12"	15"	64"	
O2E-1354M	2.0	7 GPM	15	9	13"	15"	64"	

NOTE: Residential O2E Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. "M" suffix is used for manganese reduction.



- **Reduces staining**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Corrects acid water conditions***



Patent Pending

O3 Series Iron Reduction System is a revolutionary improvement in the removal of iron from water.

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Less Maintenance.*** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	L	W	H	
O3-1054	1.0	5 GPM	10	7	28"	14"	73"	1"
O3-1054-15	1.5	5 GPM	10	7	28"	14"	73"	
O3-1248	2.0	7 GPM	14	9	30"	16"	67"	
O3-1465	3.0	9 GPM	19	11	39"	18"	85"	

NOTE: Residential O3 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice. * If ordered with "/IP10" or "M" suffix



- *Reduces staining*
- *Eliminates odors*
- *Brighter laundry*
- *Protects plumbing*
- *Corrects acid water conditions**



Patent Pending

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Less Maintenance.*** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.



Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	L	W	H	
O3E-1054	1.0	5 GPM	10	7	28"	14"	73"	1"
O3E-1054-15	1.5	5 GPM	10	7	28"	14"	73"	
O3E-1248	2.0	7 GPM	14	9	30"	16"	67"	
O3E-1465	3.0	9 GPM	19	11	39"	18"	85"	

NOTE: Residential O3E Filter Systems are not designed for continuous flow applications.
(Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice.

* If ordered with "IP10" or "M" suffix



- **Reduces Sulfur**
- **Reduces Iron**
- **Reduces Manganese**
- **Filtration down to 3 microns**

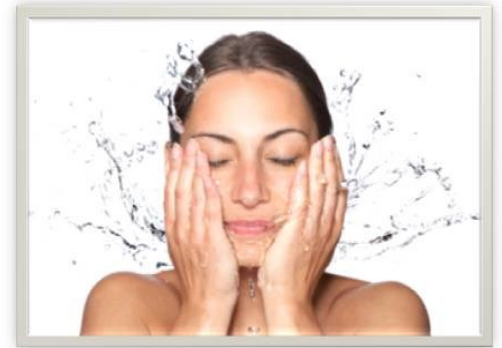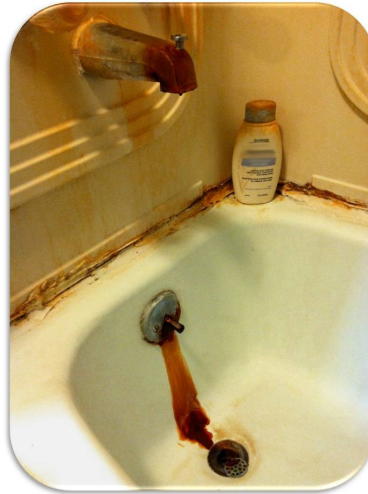

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.
- **Light Weight.** Catalytic filter media weight 66 lb./cu. ft.

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	*Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Service	Peak	L	W	H	
KLX2-1054	1.0	7 GPM	3	5	12"	15"	64"	1"
KLX2-1248	1.5	9 GPM	4	6	12"	15"	58"	
KLX2-1354	2.0	10 GPM	5	8	13"	15"	64"	
KLX2-1665	3.0	16 GPM	8	13	16"	16"	75"	



NOTE: Residential KLX2 Filter Systems are not designed for continuous flow applications.

(Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice.

*Flow rates listed are dependant upon contaminant level. Higher contaminant levels may require greater contact time.



- **Reduces Sulfur**
- **Reduces Iron**
- **Reduces Manganese**
- **Filtration down to 3 microns**

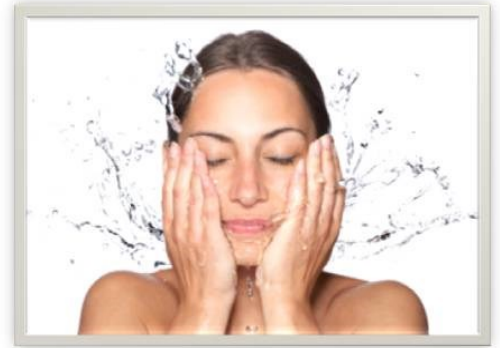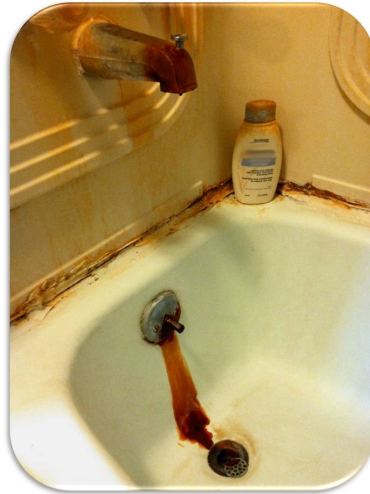


- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Small Footprint.** Small footprint allows for ease of installation.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.
- **Light Weight.** Catalytic filter media weight 66 lb./cu. ft.

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	*Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Service	Peak	L	W	H	
KLX2E-1054	1.0	7 GPM	3	5	12"	15"	64"	1"
KLX2E-1248	1.5	9 GPM	4	6	12"	15"	58"	
KLX2E-1354	2.0	10 GPM	5	8	13"	15"	64"	
KLX2E-1665	3.0	16 GPM	8	13	16"	16"	75"	

NOTE: Residential KLX2 Filter Systems are not designed for continuous flow applications.
(Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice.
*Flow rates listed are dependant upon contaminant level. Higher contaminant levels may require greater contact time.



- **Versatile**
- **Fill port available on some models**
- **Semi-transparent media tank**

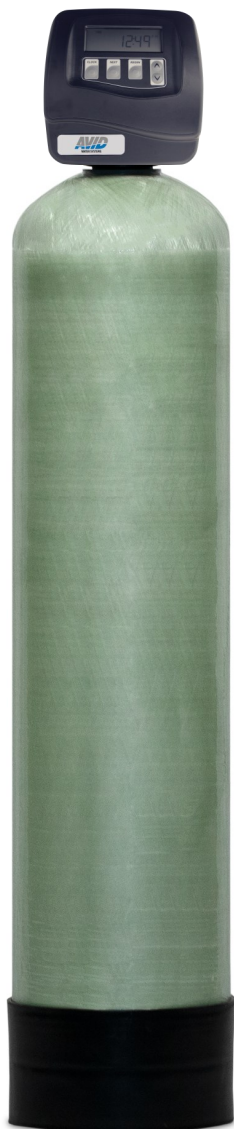

Suitable for use with the following media:

- **Activated Carbon (A05P)** For the removal of chlorine; taste and odor reduction.
- **Catalytic Carbon (ACC05P)** For the removal of chloramines and hydrogen sulfide
- **Filter Ag (FA05P)** Sediment removal down to 20 micron
- **Filter Sand (QFS05P)** Sediment reduction down to 17 micron
- **Birm (B05P)** Iron removal when raw water has a high level of dissolved oxygen
- **Calcium Carbonate (C05P)** Raises the pH of acid water and removes turbidity. Use when pH is 6.0-6.8 and hardness is less than 5 gpg.
- **Neutralizer Blend (N05)** Raises the pH when incoming water pH is less than 6.0 or hardness is greater than 5 gpg.
- **Zeolite (Z05P)** Sediment and suspended solids reduction.

Features:

Easy to Program Valve. Simple touch buttons to help with programming and manual backwashing.

Full Flow Bypass Valve. Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.

Non-corrosive Construction. Components are fiberglass and polyethylene, eliminating rust and corrosion problems.

Model Number	Media Volume cu. ft.	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D"	W"	H"	
SBF1-1044	1.0	5.3	10	5	16"	12"	52"	3/4" & 1"
SBF1-1054	1.5	5.3	10	5	16"	12"	62"	
SBF1-1248	2.0	7.5	14	8	16"	13"	56"	
SBF1-1354	2.5	9	17	9	16"	14"	62"	
SBF1-1465	3.0	11	19	11	16"	15"	74"	


NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.

NOTE 2: Above filters are not designed for continuous flow applications like ground water heat pumps.

NOTE 3: Add suffix "DH" if a dome hole is desired. Example: SBF1-1044-DH



- **Versatile**
- **Fill port available on “-DH” models**
- **Semi-transparent media tank**
- **Ready out of box to connect to 1” or 3/4” plumbing**

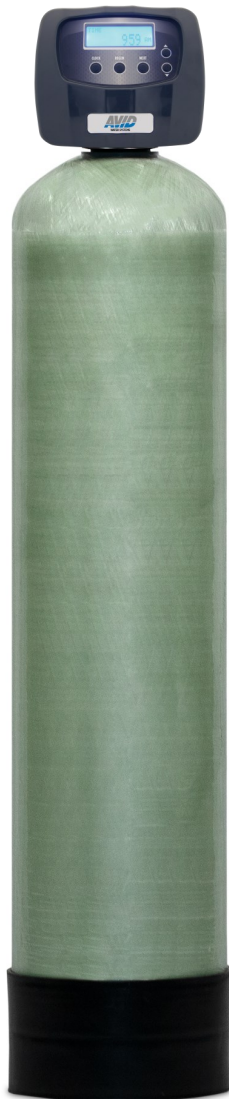

Suitable for use with the following media:

- **Activated Carbon (A05P)** For the removal of chlorine; taste and odor reduction.
- **Catalytic Carbon (ACC05P)** For the removal of chloramines and hydrogen sulfide
- **Filter Ag (FA05P)** Sediment removal down to 20 micron
- **Filter Sand (QFS05P)** Sediment reduction down to 17 micron
- **Birm (B05P)** Iron removal when raw water has a high level of dissolved oxygen
- **Calcium Carbonate (C05P)** Raises the pH of acid water and removes turbidity. Use when pH is 6.0-6.8 and hardness is less than 5 gpg.
- **Neutralizer Blend (N05)** Raises the pH when incoming water Ph is less than 6.0 or hardness is greater than 5 gpg.
- **Zeolite (Z05P)** Sediment and suspended solids reduction.

Features:

Easy to Program Valve. Simple touch buttons to help with programming and manual backwashing.

Full Flow Bypass Valve. Simple quarter turn of the handles takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.

Non-corrosive Construction. Components are fiberglass and polyethylene, eliminating rust and corrosion problems.

Mav and Relay Connections.

Model Number	Media Volume cu. ft.	Flow Rate (GPM)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D"	W"	H"	
PBF1-1044	1.0	5.3	10	5	16"	12"	52"	3/4" & 1"
PBF1-1054	1.5	5.3	10	5	16"	12"	62"	
PBF1-1248	2.0	7.5	14	8	16"	13"	56"	
PBF1-1354	2.5	9.0	17	9	16"	14"	62"	
PBF1-1465	3.0	11.0	19	11	16"	15"	74"	


NOTE 1: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.

NOTE 2: Above filters are not designed for continuous flow applications like ground water heat pumps.

NOTE 3: Add suffix “-DH” if a dome hole is desired. Ex: PBF1-1054-DH



- **Whole House Filtration**
- **Semi-transparent media tank**
- **Ready out of box to connect to 1" or 3/4" plumbing**

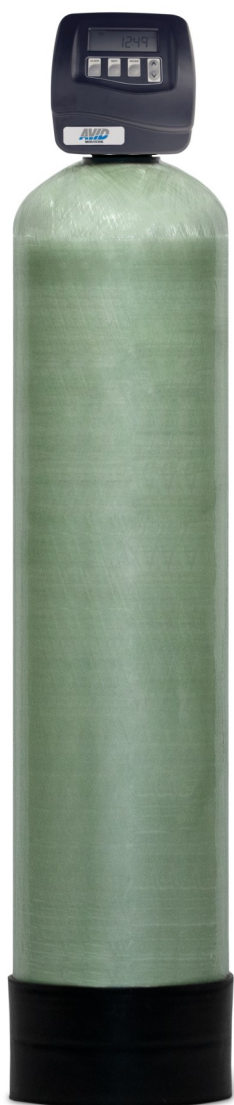

- **Scientific Media Blend.** A blend of different type of carbon medias helps this unit tackle Chloramines, Chlorine, VOCS, THMS and a variety of odors.
- **Rugged Mechanical Piston Valve.** No Solenoids or flapper valves to stick.
- **Suspended Backwashing System.** Automatically flushes contaminates down to drain then scrubs and turns over media for longer bed life.
- **Easy to Program Valve.** Simple touch buttons to help with programming and manual backwashing.
- **Full Flow Bypass Valve.** Simple quarter turn of the handles takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.
- **Non-corrosive Construction.** Components are fiberglass and polyethylene, eliminating rust and corrosion problems.


Model Number	Media Volume cu. ft.	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D"	W"	H"	
SCS1-1044	1.0	5.3	10	5	16"	11"	52"	3/4" & 1
SCS1-1054	1.5	5.3	10	5	16"	11"	62"	
SCS1-1248	2.0	7.5	14	8	17"	13"	56"	
SCS1-1354	2.5	9.0	17	9	18"	14"	62"	
SCS1-1465	3.0	11.0	19	11	18"	15"	74"	

NOTE1 : Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.

NOTE 2: Above filters are not designed for continuous flow applications like ground water heat pumps.



- **Whole House Filtration**
- **Semi-transparent media tank**
- **Ready out of box to connect to 1" or 3/4" plumbing**

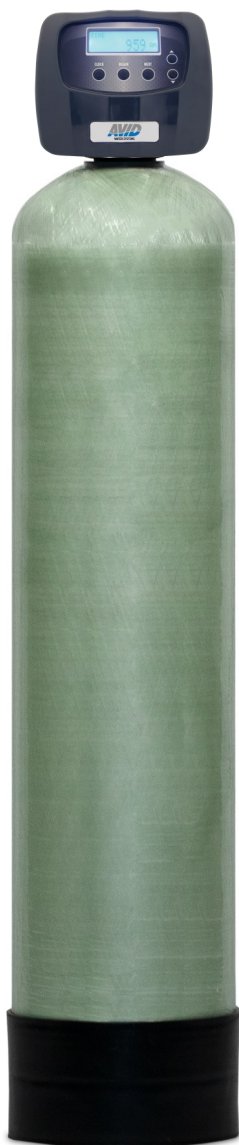

- **Scientific Media Blend.** A blend of different type of carbon medias helps this unit tackle Chloramines, Chlorine, VOCs, THMS and a variety of odors.
- **Max and Relay Connections.** Valve is capable of running no hard water valves, running in sequence, or operating a dosing pump.
- **Deep Dive History.** Detailed water usage history for better diagnostics.
- **Rugged Mechanical Piston Valve.** No Solenoids or flapper valves to stick.
- **Contractor Info.** If desired contractor name and phone number can be stored on valve. In event of needed service unit will display this information.
- **Suspended Backwashing System.** Automatically flushes contaminates down to drain then scrubs and turns over media for longer bed life.
- **Easy to Program Valve.** Simple touch buttons to help with programming and manual backwashing.
- **Full Flow Bypass Valve.** Simple quarter turn of the handles takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.
- **Non-corrosive Construction.** Components are fiberglass and polyethylene, eliminating rust and corrosion problems.

Model Number	Media Volume cu. ft.	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D"	W"	H"	
PCS1-1044	1.0	5.3	10	5	16"	11"	52"	3/4" & 1"
PCS1-1054	1.5	5.3	10	5	16"	11"	62"	
PCS1-1248	2.0	7.5	14	8	17"	13"	56"	
PCS1-1354	2.5	9.0	17	9	18"	14"	62"	
PCS1-1465	3.0	11.0	19	11	18"	15"	74"	

NOTE: Service flow rate of control valve with bypass and meter is 27gpm @ 15 psig drop.

NOTE 2: Above filters are not designed for continuous flow applications like ground water heat pumps.





Suitable for use with the following media:

- **Activated Carbon** For the removal of chlorine; taste and odor reduction.
- **Catalytic Carbon** For the removal of chloramines and hydrogen sulfide.
- **Filter Ag** Sediment removal down to 20 micron.
- **Filter Sand** Sediment reduction down to 17 micron.
- **Birm** Iron removal when raw water has a high level of dissolved oxygen.
- **Calcium Carbonate** Raises the pH of acid water and removes turbidity. Use when pH is 6.0-6.8 and hardness is less than 5 gpg.
- **Neutralizer Blend** Raises the pH when incoming water pH is less than 6.0 or hardness is greater than 5 gpg.
- **Zeolite** Suspended solids and sediment reduction.

Features:

- **Rugged Motorized Piston Control.** Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale, and hardness.
- **Full Flow Bypass Valve.** Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.
- **Non-corrosive Construction.** Components are stainless steel, fiberglass, and polyethylene, eliminating rust and corrosion problems.
- **Optional Advanced Programming.** Adjustment of each cycle duration; backwash time; and days over-ride.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Cont.	D	W	H	
NEB1044	1.0	5	8	2	10"	10"	52"	3/4" or 1"
NEB1054	1.5	5	9	3	10"	10"	62"	
NEB1248	2.0	7	12	4	12"	12"	56"	

NOTE 1: Add suffix "-1S" if a 1" pipe size is desired. Example: NEB1044-1S

NOTE 2: Add suffix "DH" if a dome hole is desired. Example: NEB1054-DH



- *Versatile*
- *Dome hole option available*
- *Plumbing protection*
- *Semi-transparent media tank*



Suitable for use with the following media:

- **Activated Carbon** For chlorine, taste and odor reduction.
- **Catalytic Carbon** For the removal of chloramines, hydrogen sulfide and VOC's.
- **Filter Ag** Low Density Sediment removal down to 40 micron
- **Filter Sand** Sediment reduction down to 20 micron
- **Birm** Iron removal when raw water has sufficient dissolved oxygen
- **Calcium Carbonate** Raises the pH of acid water and removes turbidity. Use when pH is 6.0-6.8 and hardness is less than 5 gpg.
- **Neutralizer Blend** Raises the pH when incoming water pH is less than 6.0 or hardness is greater than 5 gpg.
- **Zeolite** Sediment and suspended solids reduction.

Features:

- **Push-button Simplicity.** All settings available at your fingertips.
- **Backlight Display.** Easy to read in dark areas.
- **Rugged Motorized Piston Control.** Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale, and hardness.
- **Full Flow Bypass Valve.** Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.
- **Non-corrosive Construction.** Components are stainless steel, fiberglass, and polyethylene, eliminating rust and corrosion problems.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D	W	H	
FEB 1044	1.0	5	8	2	15"	12"	54"	3/4" or 1"
FEB 1054	1.5	5	9	3	15"	12"	64"	
FEB 1248	2.0	7	12	4	15"	13"	58"	
FEB 1465	3.0	10	16	5	15"	15"	75"	1"

NOTE 1: Add suffix "-1S" if a 1" pipe size is desired. Example: FEBW15-1S

NOTE 2: Add suffix "DH" if a dome hole is desired. Example: FEBW15-DH





Automatic Backwash Filters

Suitable for use with the following media:

- **Activated Carbon (A10)** For the removal of chlorine; taste and odor reduction
- **Catalytic Carbon (ACC10)** For the removal of chloramines and hydrogen sulfide
- **Filter Ag (F10)** Sediment removal down to 40 micron
- **Filter Sand (FS10)** Sediment reduction down to 20 micron
- **Birm (B10)** Iron removal when raw water has a high level of dissolved oxygen
- **Calcium Carbonate (C10)** Raises the pH of acid water and removes turbidity. Use when pH is 6.0-6.8 and hardness is less than 5 gpg.
- **Neutralizer Blend (N10)** Raises the pH when incoming water pH is less than 6.0 or hardness is greater than 5 gpg.
- **Zeolite** Sediment and suspended solids reduction.

Features:

Rugged Motorized Piston Control. Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale, and hardness.

Full Flow Bypass Valve. Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or providing water while the unit is being serviced.

Non-corrosive Construction. Components are stainless steel, fiberglass, and polyethylene, eliminating rust and corrosion problems.

Model Number	Media Volume (cu. ft.)	Service Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D	W	H	
FB1044	1.0	5	8	2	15"	12"	54"	3/4" or 1"
FB1054	1.5	5	9	3	15"	12"	64"	
FB1248	2.0	7	12	4	15"	13"	58"	
FB1354	3.0	10	16	5	15"	15"	75"	1"

NOTE 1: Add suffix "-1S" if a 1" pipe size is desired. Example: FB1044-1S
NOTE 2: Add suffix "DH" if a dome hole is desired. Example: FB1054-DH





CS Series Filters are designed to provide great tasting odor free water. Better for bathing cooking and drinking.

- **Easy to Program.** Just push the button to set the time of day.
- **Rugged Mineral Tank.** Fiberglass construction, will never rust or corrode.
- **Filter Cleanse Technology.** Allows the system to clean itself without the use of harsh chemicals or salt.
- **Optional Advanced Programming.** Adjustment of each cycle duration; regeneration time; and days over-ride.
- **High Performance Media.** Reduces VOCS, chlorine, THMS, chloramines, taste and odors. Filters down to 20 microns.
- **Quick Release Drain Fitting.** No threads to leak. Merely pull clip to release.
- **Stainless Steel Bypass.** Operates with single handle, 3/4" or 1" (with "-1S" model suffix) female threads.
- **Insulated Tank Jacket.** Stops condensation.

Model Number	Media Volume (cu. ft.)	*Estimated Media Life (gallons)	Flow Rate (gpm)			Overall Dimensions			Connections
			Peak	Service	Cont.	D	W	H	
CS-1	1.0	620,000	8	5	2	14"	10"	52"	3/4" or 1" NPTF
CS-1.5	1.5	775,000	9	6	3	14"	10"	62"	
CS-2	2.0	1,600,000	12	8	4	14"	12"	56"	
CS-2.5	2.5	2,220,000	13	9	5	14"	13"	62"	

* Media life can vary significantly based on local water quality.
NOTE: Only intended for use on chlorinated water.



Sources of Contamination

- **Pesticides**
- **Herbicides**
- **Insecticides**
- **Lead Pipes**
- **Industrial Waste**
- **Natural Deposits**

The PMR1 Series heavy metals reducers from Avid are specially designed to reduce the contaminant level in water below the EPA MCL. The PMR1 Series models are affordable and efficient to operate in reducing unwanted arsenic, lead & other heavy metals from your household water.

- **Nonhazardous Disposal.** Media can be disposed as solid waste due to non-leaching material.
- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Patented Material.** Patented material used for reduction of arsenic 3, arsenic 5, lead, cadmium, copper, antimony, mercury, zinc, nickel and selenium.
- **Limited Maintenance.** The only maintenance required is the occasional media replacement.
- **Rugged Control Valve.** Provides years of dependable service and has proven durability.
- **Reduces Heavy Metals.** Heavy metals are reduced utilizing the adsorption process by up to 99+% of contamination typically found in potable water sources.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.
- **Push-Button Simplicity.** All settings available at your fingertips.



Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D	W	H	
PMR1-1044	1.0	3.2	11	5	16"	12"	52"	3/4" & 1"
PMR1-1248	2.0	5.3	12	8	16"	13"	56"	
PMR1-1465	3.0	7.5	13	11	17"	15"	74"	

Pre-Requisites for successful application: Iron < 0.1 ppm, Manganese < 0.01 ppm, pH < 8.0, Silica < 30 ppm, Hardness > 5 gpg is preferred but not required unless silica is present, contact Sterling Technical Services for sizing based on the level of contaminant in the water and flow rate requirement. Regular testing is required to indicate when filter media should be replaced.



Sources of Contamination

- Pesticides
- Herbicides
- Insecticides
- Lead Pipes
- Industrial Waste
- Natural Deposits



Arsenic, Lead & Other Heavy Metals Reduction

The FEB Series heavy metals reducers from Avid are specially designed to reduce the contaminant level in water below the EPA MCL.

The FEB Series models are affordable and efficient to operate in reducing unwanted arsenic, lead & other heavy metals from your household water.

- **Nonhazardous Disposal.** Media can be disposed as solid waste due to non-leaching material.
- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Patented Material.** Patented material used for reduction of arsenic 3, arsenic 5, lead, cadmium, copper, antimony, mercury, zinc, nickel and selenium.
- **Limited Maintenance.** The only maintenance required is the occasional media replacement.
- **Rugged Control Valve.** Provides years of dependable service and has proven durability.
- **Reduces Heavy Metals.** Heavy metals are reduced utilizing the adsorption process by up to 99+% of contamination typically found in potable water sources.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.
- **Push-Button Simplicity.** All settings available at your fingertips.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)			Overall Dimensions			Pipe Size
		Backwash	Peak	Service	D	W	H	
FEB1044HMX	1.0	5	11	5	15"	12"	54"	3/4"
FEB1248HMX	2.0	7	12	8	16"	13"	58"	
FEB1465HMX	3.0	9	13	11	17"	15"	75"	1"
FEB1665HMX	4.0	10	14	14	18"	16"	75"	

Pre-Requisites for successful application: Iron < 0.1 ppm, Manganese < 0.01 ppm, pH < 8.0, Silica < 30 ppm, Hardness > 5 gpg is preferred but not required unless silica is present, contact Avid Technical Services for sizing based on the level of contaminant in the water and flow rate requirement. Regular testing is required to indicate when filter media should be replaced.



- **Reduces stains**
- **Eliminates odors**
- **Brighter laundry**
- **Protects plumbing**
- **Ready out of box to connect to 1" or 3/4" plumbing**

The PTR1 Series is low maintenance and designed to handle problem water that contains high amounts of tannin and phosphates. Our specially formulated media exchanges standard water softener salt for tannin. Our high capacity tannin removal system maximizes the amount of treated water available to the home.

- **Non-corrosive Construction.** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.
- **Push-button Simplicity.** All settings and information retrievable at your fingertips.
- **Regenerates with just salt.** No costly or dangerous chemical required.
- **Hefty Brine Tank*.** Large, 220 lb. capacity tank reduces the frequency of salt refill. Salt support platform keeps the salt dry and stops "mushing". Safety brine valve prevents overflow of salt brine.

* Salt capacity does not apply to space saver or cabinet models.



Model Number	100% Tannin Media Volume	Tannin Capacity (ppm-gal)	Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Pipe Size
				Peak	Service	D	W	H	
PTR1-0948	1.0	2,100	Time Clock	22	5	18"	24"	56"	3/4" & 1"
PTR1-1054	1.5	3,150		22	8	18"	25"	62"	
PTR1-1248	2.0	4,200		25	10	18"	30"	56"	
PTR1-1354	2.5	5,250		25	13	18"	31"	62"	
PTR1-1465	3.0	6,300		25	15	23"	32"	74"	

Pre-Requisites for successful application: This unit must be supplied with potable water that is soft, iron free and filtered to 5 microns



- Clear Water
- Reduced Staining
- Sparkling Dishes
- Cleaner Laundry



FEST Series units are designed to remove tannic acid, “ice tea” color from your water. Hardness is eliminated and iron greatly reduced.

- **Regeneration with merely salt.** No costly or dangerous chemicals required.
- **Inexpensive.** One unit does the work of three. Softener reduces iron (<0.5 ppm), hardness (<10 gpg), and tannin.
- **Low maintenance.** Occasional salt replenishment is required.
- **Optional Advance Programming.** The adjustment of each cycle duration; regeneration time; and days over-ride.

Model Number	Mixed Bed Media Volume	Hardness Capacity (grains)	Tannin Capacity (ppm)	Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Pipe Size
					Peak	Service	D	W	H	
FEST1054	1.5	24,000	1,000	Electronic Meter	14	8	14"	25"	63"	3/4"
FEST1248	2.0	29,000	1,000		16	10	18"	31"	57"	




Sources of Contamination

- **Fertilizer**
- **Septic systems**
- **Atmosphere**
- **Animal waste**
- **Chemical Additives**

The PNR1 Series water conditioners from Avid are specifically designed to effectively reduce nitrate, sulfate & fluoride found in water sources. The PNR1 Series models are affordable and efficient to operate in reducing these unwanted contaminants from your household water.

- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Limited Maintenance.** The only maintenance required is the addition of salt to the brine tank.
- **Regeneration with ordinary salt.** No costly or dangerous chemical required.
- **Reduces Nitrate, sulfate & fluoride.** Contaminants are reduced by utilizing the ion exchange process.
- **Rugged Control Valve.** Proven to provide years of dependable service and durability.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.

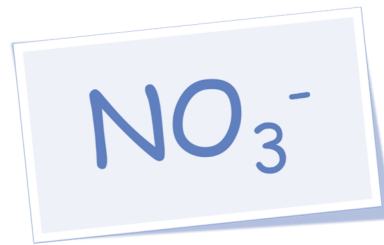**PNR1 Series Nitrate, Sulfate & Fluoride System**

Model Number	Resin Volume	Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Salt Storage	Pipe Size
			Peak	Service	D	W	H		
PNR1-0948	1.0	Time Clock	15	5	16"	24"	56"	160 lbs	3/4" & 1"
PNR1-1248	1.7		18	9	18"	31"	56"	220 lbs	

NOTE: Influent water quality 0.05 ppm max. iron, 1 grain max. hardness.



Sources of Nitrate

- Fertilizer
- Septic Systems
- Atmosphere
- Animal Waste
- Chemical Additives



Whole House Water Conditioning

The FESN Series water conditioners from Sterling are specifically designed to effectively reduce nitrate, sulfate & fluoride found in water sources. The FESN Series models are affordable and efficient to operate in reducing these unwanted contaminants from your household water.

- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Limited Maintenance.** The only maintenance required is the addition of salt to the brine tank.
- **Regeneration with ordinary salt.** No costly or dangerous chemical required.
- **Reduces Nitrate, sulfate & fluoride.** Contaminants are reduced by utilizing the ion exchange process.
- **Rugged Control Valve.** Provides years of dependable service. Can be programmed to handle severe nitrates, yet provide maximum salt efficiency. Years of proven durability.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.
- **Salt Support Platform.** Allows the use of any type of water softener salt. Minimizes "salt mushing" and necessity of frequent cleaning.



Model Number	Resin Volume	Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Salt Storage	Pipe Size
			Peak	Service	D	W	H		
FESN0948	1.0	Time Clock	14	5	14"	24"	57"	160 lbs	*3/4"
FESN1248	2.0		16	9	18"	31"	57"	220 lbs	

NOTE: Influent water quality 0.05 ppm max. iron, 1 grain max. hardness.

* 1" available with "-1S" suffix added to model number.



Sources of Contamination

- Fertilizer
- Septic Systems
- Atmosphere
- Animal Waste
- Chemical Additives



Whole House Water Conditioning

The FSN Series water conditioners from Sterling are specifically designed to effectively reduce nitrate, sulfate & fluoride found in water sources. The FSN Series models are affordable and efficient to operate in reducing these unwanted contaminants from your household water.

- **Corrosion-Resistant Construction.** The entire system utilizes stainless steel, fiberglass, and polyethylene so rust and corrosion are eliminated.
- **Limited Maintenance.** The only maintenance required is the addition of salt to the brine tank.
- **Regeneration with ordinary salt.** No costly or dangerous chemical required.
- **Reduces Nitrate, sulfate & fluoride.** Contaminants are reduced by utilizing the ion exchange process.
- **Rugged Control Valve.** Provides years of dependable service. Can be programmed to handle severe nitrates, yet provide maximum salt efficiency. Years of proven durability.
- **Easy to Repair.** Control valve provides years of quality performance and is easy to repair. This cuts down the time of service calls.
- **Salt Support Platform.** Allows the use of any type of water softener salt. Minimizes "salt mushing" and necessity of frequent cleaning.



Model Number	Resin Volume	Type of Regeneration	Flow Rate (gpm)		Overall Dimensions			Salt Storage	Pipe Size
			Peak	Service	D	W	H		
FSN0948	1.0	Time Clock	14	5	14"	24"	57"	160 lbs	*3/4"
FSN1248	2.0		16	9	18"	31"	57"	220 lbs	

NOTE: Influent water quality 0.05 ppm max. iron, 1 grain max. hardness.

* 1" available with "-1S" suffix added to model number.



DF Series Filters are built with activated filter media the removal of taste, odor and chlorine.

- **Translucent Filter Tank** allows visual inspection of media level without disassembly.
- **One Inch Porting** allows higher flow rates with less pressure drop.
- **Union Connections** for quick servicing of unit.
- **Full Flow Bypass Valve** for easy to use, two handle valve allows you to water the yard or garden with raw water. Also, allows uninterrupted water service during periodic maintenance.



Model Number	Media Volume (cu. ft.)	Service Flow Rate (gpm)		Overall Dimensions			Pipe Size
		Peak	Continuous	D	W	H	
DF1044	1.0	10	3	14"	10"	52"	3/4" or 1"
DF1054	1.5	11	3	14"	10"	60"	
DF1248	2.0	13	4	15"	12"	54"	
DF1354	2.5	14	5	16"	13"	60"	
DF1465	3.0	16	5	17"	16"	71"	

NOTE 1: Above filters are not designed for continuous flow applications like ground water heat pumps.





DF Chloramine Series Filters are designed to work with various filter medias. The most common filter media is catalytic activated carbon for the reduction of taste, odor, chloramines, and VOCs.

- **Large Distributor Head** for easy bypass and plumbing installation.
- **Translucent Filter Tank** allows visual inspection of media level without disassembly.
- **One Inch Porting** allows higher flow rates with less pressure drop.
- **Union Connections** for quick servicing of unit.
- **Full Flow Bypass Valve** for easy to use, two handle valve allows you to water the yard or garden with raw water. Also, allows uninterrupted water service during periodic maintenance.
- **Includes HiFlo Housing with filter** for reduction of incoming particles. Sediment filter reduces silt and sediment down to 5 microns.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
		Peak	Continuous	D	W	H	
DF1044-CHLORAMINE	1.0	10	3	14"	10"	52"	3/4" or 1"
DF1054-CHLORAMINE	1.5	11	3	14"	10"	60"	
DF1248-CHLORAMINE	2.0	13	4	15"	12"	54"	
DF1354-CHLORAMINE	2.5	14	5	16"	13"	60"	
DF1465-CHLORAMINE	3.0	16	5	17"	16"	71"	

NOTE 1: Above filters are not designed for continuous flow applications like ground water heat pumps.





PUN1-DH Series Filters are designed to elevate the pH of acidic water. Raising the pH of acid water stops the corrosion of metal pipe fittings and fixtures. How high the pH is increased depends on the media chosen and contact time.

- **Large Fill Port** for easy replenishment of filter media.
- **Translucent Filter Tank** allows visual inspection of media level without disassembly.
- **One Inch Porting** allows higher flow rates with less pressure drop.
- **Upflow Design** prevents media from cementing.
- **Union Connections** for quick servicing of unit.
- **Full Flow Bypass Valve** for easy to use, two handle valve allows you to water the yard or garden with raw water. Also, allows uninterrupted water service during periodic maintenance.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
		Peak	Service	D	W	H	
PUN1-1044-DH	1.0	8	6	14"	10"	52"	3/4" & 1"
PUN1-1054-DH	1.5	12	8	14"	10"	62"	
PUN1-1248-DH	2.0	14	10	15"	12"	56"	
PUN1-1354-DH	2.5	18	12	16"	13"	62"	
PUN1-1465-DH	3.0	20	14	17"	14"	74"	

NOTE 1: Filters are not designed for continuous flow applications like ground water heat pumps.

NOTE 2: How high the pH is raised depends on the hardness or the water; raw water pH; contact time, and media selected.





*UN Filters are designed to elevate the pH of acidic water.
Raising the pH stops corrosion of metal fittings and fixtures.*

UN Series Filters are designed to elevate the pH of acidic water. Raising the pH of acid water stops the corrosion of metal pipe fittings and fixtures. How high the pH is increased depends on the media chosen and contact time.

- **Large Fill Port** for easy replenishment of filter media.
- **Translucent Filter Tank** allows visual inspection of media level without disassembly.
- **One Inch Porting** allows higher flow rates with less pressure drop.
- **Upflow Design** prevents media from cementing.
- **Union Connections** for quick servicing of unit.
- **Full Flow Bypass Valve** for easy to use, two handle valve allows you to water the yard or garden with raw water. Also, allows uninterrupted water service during periodic maintenance.

Model Number	Media Volume (cu. ft.)	Flow Rate (gpm)		Overall Dimensions			Pipe Size
		Peak	Cont.	D	W	H	
UN1044	1.0	10	2	14"	10"	52"	3/4" or 1"
UN1054	1.5	11	3	14"	10"	60"	
UN1248	2.0	12	3	15"	12"	54"	
UN1354	2.5	13	3	16"	13"	60"	
UN1465	3.0	14	4	17"	16"	71"	

NOTE 1: Filters are not designed for continuous flow applications like ground water heat pumps.

NOTE 2: How high the pH is raised depends on the hardness of the water; raw water pH; contact time, and media selected.



STERLING

WATER TREATMENT

- Sanitary quick-change cartridges pivot for easy removal

- Decorator faucet (Model Q1-CB1 only)

- Great tasting drinking water, coffee & ice cubes

- Scale inhibitor to protect coffee machines, ice machines, & humidifiers (Model Q1-SR1 only)

- No storage tank required

Q1 Series

Quick Change Single Cartridge System



Model Q1-CB1



Model Q1-SR1

Q1 Series, single cartridge, sanitary quick connect systems are available for taste & odor improvement of drinking water (Model Q1-CB1) or scale reduction (Model Q1-SR1) with taste & odor improvement.

Improve the flavor of water, coffee and ice cubes. Protect water using appliances such as coffee machines, ice makers and residential humidifiers from costly scale build up. Both systems reduce contaminants which have a detrimental effect on flavor and odor, such as chlorine.

Model Number	Max Flow*	Service Life	Max Pressure	Water Temp.
Q1-CB1	1 GPM	5,000 gal	80 psi	40° - 125°
Q1-SR1	1 GPM	800 gal	80 psi	40° - 125°

Dimensions				Pipe Size
Height	Bracket Holes	Width	Depth	
13"	2-1/4"	5.5"	3.5"	1/4"

*Actual GPM produced will vary depending on water pressure, temperature, and TDS.



STERLING

WATER TREATMENT

- **Sanitary quick-change cartridges**
- **50 GPD membrane***
- **Decorator faucet**
- **Clear ice cubes**
- **Healthy, sparkling, clear drinking water**
- **Better tasting beverages, soups, and sauces**

QCRO Series

Quick Change
Reverse Osmosis



Cartridges pivot out for easy removal!

The QCRO Series Reverse Osmosis Drinking Water System reduces harmful contaminants and turns common tap water into the fresh, quality water that nature intended us to drink. A 5-stage system filters water at the molecular level. Drawn water passes through a final carbon filter to remove any unwanted tastes or odors. The result is simply healthier, better tasting water.

R.O. System Pre-Requirements

- Less than 7 GPG Hardness
- Less than 0.1 PPM Iron
- Less than 0.05 PPM Manganese
- No Hydrogen Sulfide
- Use only on microbiologically safe water
- 40 psi inlet pressure minimum
 - If inlet pressure is lower select QCRO-50-PUMP model instead

- **Environmentally sound water treatment.**
- **Cost effective:** the daily cost of bottled water will no longer be a concern.
- **Convenient:** fresh, clean water ready at your tap --no more handling of jugs.

Model Number	Membrane Rating*	% Rejection	Max TDS	Water Temp.	Overall Dimensions			Storage Tank
					D	W	H	
QCRO-50	50 GPD	75 - 97%	800 PPM	40° - 100°	4.75"	13.5"	19"	10" Dia. X 15" H

*Actual gallons produced will vary depending on water pressure, temperature, and TDS.





- **Sanitary quick-change cartridges**
- **Decorator Faucet**
- **Clear ice cubes**
- **Better tasting beverages, soups and sauces when prepared with R.O. water**

QCRO-PUMP Series

Quick Change Reverse Osmosis System



The QCRO Series Reverse Osmosis Drinking Water System reduces harmful contaminants and turns common tap water into the fresh, quality water that nature intended us to drink. A 5-stage system filters water at the molecular level. Drawn water passes through a final carbon filter to remove any unwanted tastes or odors. The result is simply healthier, better tasting water.



- **Environmentally sound water treatment.**
- **Cost effective:** the daily cost of bottled water will no longer be a concern.
- **Convenient:** fresh, clean water ready at your tap - no more handling of jugs.
- **Easy to maintain:** cartridges pivot out for easy removal.
- **Booster Pump:** Increases water pressure that improves the quality & quantity of water produced.

R.O. System Pre-Requirements

- Less than 7 GPG Hardness
- Less than 0.1 PPM Iron
- Less than 0.05 PPM Manganese
- No Hydrogen Sulfide
- Use only on microbiologically safe water



Model Number	Membrane Rating*	% Rejection	Max TDS	Water Temp.	Overall Dimensions			Storage Tank
					D	W	H	
QCRO-50-PUMP	50 GPD	85 - 97%	1800 PPM	40° - 100°	10.25"	11"	14.25"	10" Dia. X 15" H
QCRO-100-PUMP	100 GPD	85 - 97%	1800 PPM	40° - 100°	10.25"	11"	14.25"	10" Dia. X 15" H

*Actual gallons produced will vary depending on water pressure, temperature, and TDS. Pump model will provide closer to maximum gallons per day.



STERLING

WATER TREATMENT

- Sanitary quick-change cartridges
- Decorator faucet
- No storage tank needed
- Healthy, sparkling, clear drinking water
- Better tasting beverages, soups, and sauces

CRS-3 Series

Quick Change Chemical
Reduction System



*Actual product style and colors may vary



*Actual product style and colors may vary

Cartridges pivot out for easy removal!

The CRS-3 Series Drinking Water System reduces harmful contaminants like some bacteria, viruses, and VOC's and turns common tap water into the fresh, quality water that nature intended us to drink. A 3-stage system filters water at the molecular level. The .03µ hollow fiber membrane is made from a strong polymeric fiber that removes extremely fine sediment including colloids. The result is simply healthier, better tasting water.

- **Environmentally sound water treatment.**
- **Cost effective:** the daily cost of bottled water will no longer be a concern.
- **Convenient:** fresh, clean water ready at your tap -- no more handling of jugs.
- **No water wasted to drain.**

CRS-3 System Pre-Requirements

- Less than 2000 ppm TDS
- Less than 200 ppm of Chlorine
- Use only on microbiologically safe water

Model Number	Max Flow*	Service Life	Max Pressure	Water Temp.
CRS-3	1 GPM	5,000 gal	125 psi	40° - 125°

*Actual GPM produced will vary depending on water pressure, temperature, and TDS.





- *Healthy, sparkling, clear drinking water*
- *Pristine, flavorful coffee, tea and juice.*
- *Clear ice cubes*
- *Better tasting soups, sauces, and meals when prepared with R.O. water*

DWSB PERM Series

Reverse Osmosis System



The DWSB PERM Series Reverse Osmosis Drinking Water System has increased efficiency and productivity. The waste water from the RO provides the power to drive the permeate pump. Treated water is pumped into the storage tank. The result is a remarkable increase in unit efficiency. Since the membrane can fill the storage tank much faster without the hindrance of back pressure, less water is sent to drain and more impurities are removed from the product water. It's a win-win situation.

- **Environmentally sound water treatment.**
- **Cost effective:** the daily cost of bottled water will no longer be a concern.
- **Convenient:** fresh, clean water ready at your tap - no more handling of jugs.
- **Easy to maintain:** uses standard 10" cartridge filters.



R.O. System Pre-Requirements

- Less than 7 GPG Hardness
- Less than 0.1 PPM Iron
- Less than 0.05 PPM Manganese
- No Hydrogen Sulfide
- Use only on microbiologically safe water

Model Number	Membrane Rating*	% Rejection	Max TDS	Water Temp.	Overall Dimensions			Storage Tank
					D	W	H	
DWSB-50-PERMPUMP	50 GPD	85 - 97%	800 PPM	40° - 100°	5.5"	16"	20"	10" Dia. X 15" H

*Actual gallons produced will vary depending on water pressure, temperature, and TDS.





- *Healthy, sparkling, clear drinking water*
- *Pristine, flavorful coffee, tea and juice.*
- *Clear ice cubes*
- *Better tasting soups, sauces, and meals when prepared with R.O. water*

DWSB Series

Reverse Osmosis System



The DWSB Series Reverse Osmosis Drinking Water System reduces harmful contaminants and turns common tap water into the fresh, quality water that nature intended us to drink. A 5-stage system filters water at the molecular level. Drawn water passes through a final carbon filter to remove any unwanted tastes or odors. The result is simply healthier, better tasting water.

- **Environmentally sound water treatment.**
- **Cost effective:** the daily cost of bottled water will no longer be a concern.
- **Convenient:** fresh, clean water ready at your tap - no more handling of jugs.
- **Easy to maintain:** uses standard 10" cartridge filters.



R.O. System Pre-Requirements

- Less than 7 GPG Hardness
- Less than 0.1 PPM Iron
- Less than 0.05 PPM Manganese
- No Hydrogen Sulfide
- Use only on microbiologically safe water

Model Number	Membrane Rating*	% Rejection	Max TDS	Water Temp.	Overall Dimensions			Storage Tank
					D	W	H	
DWSB-TFC-50	50 GPD	70 - 95%	800 PPM	40° - 100°	5.5"	16"	20"	10" Dia. X 15" H

*Actual gallons produced will vary depending on water pressure, temperature, and TDS. Pump model will provide closer to maximum gallon per day.



STERLING

WATER TREATMENT

Sources of Contamination

- Fertilizer
- Septic Systems
- Atmosphere
- Animal Waste
- Chemical Additives

NRS-1

Point-of-Use, Nitrate, Sulfate & Fluoride Reduction System

The NRS Series filter from Sterling is specifically designed to effectively reduce nitrate, sulfate & fluoride found in water sources. The NRS-1 is an affordable and efficient way to reduce these unwanted contaminants from a point of use water source.



Product may vary from picture shown

- **Automatic Water Meter.** Easy set non-electric water meter shuts off outgoing water to indicate when the cartridge should be changed.
- **Cost Effective.** The daily cost of bottled water will no longer be a concern.
- **Reduces Nitrates, Sulfates & Fluorides.** Contaminants are reduced by utilizing the ion exchange process.
- **Long Reach Faucet.** Every unit contains a luxury long reach chrome faucet for elegant appearance and easy access to your treated water.
- **Easy to Change Filters.** Every housing includes a easy access wrench for cartridge changing.
- **Depressurizing Button.** A red button is included on all housings for quick depressurizing of the system when changing filters.
- **Easy Installation.** All systems include a wrench, bracket, water meter, luxury faucet, tubing, shut-off valves, fittings, and a saddle valve for a quick, no hassle, no mess install.

NRS Series Nitrate, Sulfate & Fluoride Filter

Model Number	Inlet/Outlet	Max Flow Rate	Overall Height (Inches)	Water Temp.	Max Pressure
NRS-1	1/4"	1.0 GPM	14"	40° - 100°	100 psi

NOTE: 20 ppm max. nitrate, 0.05 ppm max. iron, 1 grain max. hardness.



STERLING

WATER TREATMENT

Sources of Contamination

- **Pesticides**
- **Herbicides**
- **Insecticides**
- **Lead Pipes**
- **Industrial Waste**
- **Natural Arsenic Deposits**

HMX-1

Heavy Metals Reduction System

Point of Use Heavy Metals Reduction

The HMX-1 heavy metals reducer from Sterling is designed to effectively treat most common heavy metal contamination found in potable water sources. The HMX-1 is an affordable and efficient way to reduce unwanted heavy metals from a point-of-use water source.



Product may vary from picture shown

- **Automatic Water Meter.** Easy set non-electric water meter shuts off outgoing water to indicate when the cartridge should be changed.
- **Nonhazardous Disposal.** Media can be disposed as solid waste due to non-leaching material.
- **Cost Effective.** The daily cost of bottled water will no longer be a concern.
- **Reduces Heavy Metals.** Patented material used for reduction of arsenic 3, arsenic 5, lead, cadmium, copper, antimony, mercury, zinc, nickel and selenium.
- **Removal Efficiency.** Up to 99+% reduction of most typical levels of heavy metals.
- **Long Reach Faucet.** Every unit contains a luxury long reach chrome faucet for elegant appearance and easy access to your treated water.
- **Easy to Change Filters.** Every housing includes a easy access wrench for cartridge changing.
- **Depressurizing Button.** A red button is included on all housings for quick depressurizing of the system when changing filters.
- **Easy Installation.** All systems include a wrench, bracket, water meter, luxury faucet, tubing, shut-off valves, fittings, and a saddle valve for a quick, no hassle, no mess install.

HMX-1 Heavy Metals Filter

Model Number	Inlet/Outlet	Max Flow Rate	Overall Height (Inches)	Water Temp.	Max Pressure
HMX-1	1/4"	0.5 GPM	14"	40° - 100°	100 psi

NOTE: 0.1 ppm max. iron, 8.0 max. pH, 0.01 ppm max. manganese, 30 ppm max. silica, ≥ 5 grain hardness preferred; required if silica is present.



STERLING

WATER TREATMENT

S500SS ***Scale Inhibitor System***

***Reduces scale buildup in tankless
and conventional water heaters***



- **Flow Rate.** 10 gpm.
- **Stainless Steel Tee.** 3/4" Tee. Sturdy, will not rust or corrode.
- **Long Life.** Replace cartridge every 6 months.
- **Wide Temperature Range.** 40-100 degree F.
- **Easy Change.** Threaded cartridge with O-ring.
- **Operating Pressure.** 30-100 PSI.

NOTE 1: This system is not necessary if the water heater is protected by ion exchange water softener.

NOTE 2: If the water hardness is above 15 grains per gallon an ion exchange water softener is highly recommended.



Replacement Cartridge



Drinking Water
And
Whole House



Cartridge Filters



...THE NEXT GENERATION



www.sterlingwatertreatment.com

Sediment Cartridges



Hot Water Version

- With stainless steel core



Polypropylene String Wound

- Ideal for well water installations
- Depth filtration
- Reduction of sand, silt, scale, & rust particles
- Maximum temperature 100°F
- Individually shrink wrapped

Poly-Bonded

- 100% polypropylene construction
- Micro-fiber design
- With stands high pressure differentials
- Provides depth filtration
- Maximum temperature 140°F
- Individually shrink wrapped

Grooved Poly-Bonded

- Provides a gradient density for high dirt-holding capacity superior sediment filtration
- 100% pure polypropylene
- Large surface area
- Excellent bacteria & chemical resistance
- Maximum temperature 140°F
- Individually shrink wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
SW1001-24	2.5 x 10	1	8 gpm	24
SW1005-24	2.5 x 10	5	8 gpm	24
SW1010-24	2.5 x 10	10	10 gpm	24
SW1020-24	2.5 x 10	20	10 gpm	24
SW2005-30	2.5 x 20	5	16 gpm	30
SW2010-30	2.5 x 20	10	20 gpm	30
SW2020-30	2.5 x 20	20	20 gpm	30
SWJ1005-9	4.5 x 10	5	12 gpm	9
SWJ1010-9	4.5 x 10	10	12 gpm	9
SWJ1020-9	4.5 x 10	20	12 gpm	9
SWJ2005-9	4.5 x 20	5	24 gpm	9
SWJ2010-9	4.5 x 20	10	24 gpm	9
SWJ2020-9	4.5 x 20	20	24 gpm	9
SW1005-24-HT	2.5 x 10	5	8 gpm	24

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PB0505-24	2.5 x 05	5	3 gpm	24
PB0510-24	2.5 x 05	10	3 gpm	24
PB0520-24	2.5 x 05	20	3 gpm	24
PB1005-24	2.5 x 10	5	10 gpm	24
PB1010-24	2.5 x 10	10	10 gpm	24
PB1020-24	2.5 x 10	20	10 gpm	24
PB2005-24	2.5 x 20	5	20 gpm	24
PB2010-24	2.5 x 20	10	20 gpm	24
PB2020-24	2.5 x 20	20	20 gpm	24
PBJ1005-9	4.5 x 10	5	12 gpm	9
PBJ1010-9	4.5 x 10	10	12 gpm	9
PBJ1020-9	4.5 x 10	20	12 gpm	9
PBJ2005-9	4.5 x 20	5	24 gpm	9
PBJ2010-9	4.5 x 20	10	24 gpm	9
PBJ2020-9	4.5 x 20	20	24 gpm	9

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
GB0505-24	2.5 x 05	5	3 gpm	24
GB0510-24	2.5 x 05	10	3 gpm	24
GB0520-24	2.5 x 05	20	3 gpm	24
GB1005-24	2.5 x 10	5	10 gpm	24
GB1010-24	2.5 x 10	10	10 gpm	24
GB1020-24	2.5 x 10	20	10 gpm	24
GB2005-24	2.5 x 20	5	20 gpm	24
GB2010-24	2.5 x 20	10	20 gpm	24
GB2020-24	2.5 x 20	20	20 gpm	24
GBJ1005-9	4.5 x 10	5	12 gpm	9
GBJ1010-9	4.5 x 10	10	12 gpm	9
GBJ1020-9	4.5 x 10	20	12 gpm	9
GBJ2005-9	4.5 x 20	5	24 gpm	9
GBJ2010-9	4.5 x 20	10	24 gpm	9
GBJ2020-9	4.5 x 20	20	24 gpm	9

Sediment Cartridges



Polyester Pleated

- Cleanable & reusable
- Excellent for municipal & well water
- Large surface area
- High flow rates
- Resistant to bacterial growth
- Maximum Temp. 100°F
- Individually wrapped



Cellulose Pleated

- Economically priced sediment cartridge for municipal/ chlorinated water only (not recommended for well water)
- Maximum Temp. 100°F
- Individually wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PP1005-24	2.5 x 10	5	12 gpm	24
PP1010-24	2.5 x 10	10	12 gpm	24
PP1020-24	2.5 x 10	20	12 gpm	24
PP2005-24	2.5 x 20	5	24 gpm	24
PP2010-24	2.5 x 20	10	24 gpm	24
PP2020-24	2.5 x 20	20	24 gpm	24
PPJ1005-9	4.5 x 10	5	20 gpm	9
PPJ1010-9	4.5 x 10	10	20 gpm	9
PPJ1020-9	4.5 x 10	20	20 gpm	9
PPJ2005-9	4.5 x 20	5	35 gpm	9
PPJ2010-9	4.5 x 20	10	35 gpm	9
PPJ2020-9	4.5 x 20	20	35 gpm	9

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PC1005-24	2.5 x 10	5	12 gpm	24
PC1010-24	2.5 x 10	10	12 gpm	24
PC1020-24	2.5 x 10	20	12 gpm	24
PC2005-24	2.5 x 20	5	24 gpm	24
PC2010-24	2.5 x 20	10	24 gpm	24
PC2020-24	2.5 x 20	20	24 gpm	24
PCJ1005-9	4.5 x 10	5	20 gpm	9
PCJ1010-9	4.5 x 10	10	20 gpm	9
PCJ1020-9	4.5 x 10	20	20 gpm	9
PCJ2005-9	4.5 x 20	5	35 gpm	9
PCJ2010-9	4.5 x 20	10	35 gpm	9
PCJ2020-9	4.5 x 20	20	35 gpm	9

Inline Carbon Filters



Inline Filters

- 6" & 10" lengths available
- Choice of threaded or quick release connectors
- 1/4" and 3/8" connections
- Maximum Temp. 100°F
- Maximum Pressure 80 psi

Part Number	Inlet/Outlet	Micron Rating	Max Flow	Length	Case Qty
IC06Q-12	1/4" QC	5	1 gpm	6"	12
IC06Q-38	3/8" QC	5	1 gpm	6"	1
IC06T	1/4" FNPT	5	1 gpm	6"	1
IC10Q-12	1/4" QC	5	1 gpm	10"	12
IC10T-12	1/4" FNPT	5	1 gpm	10"	12

Taste & Odor Cartridges



Granular Activated Carbon

- Total flow through design provides extended contact time for better taste, odor, and chlorine reduction
- Top grade coconut shell carbon has a wide range of pore sizes to remove more types of contaminants
- Maximum temperature 100°F
- Individually shrink wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
GAC10-20	2.5 x 10	10	2.5 gpm	20
GAC20-20	2.5 x 20	10	4 gpm	20
GACJ10-9	4.5 x 10	10	5 gpm	9
GACJ20-9	4.5 x 20	10	8 gpm	9

Carbon Block

- Radial flow design provides superior flow rates
- 5 Micron construction acts as a sediment filter
- Excellent taste, odor, and chlorine removal
- No carbon fines are released
- Maximum temperature 140°F
- Individually shrink wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
CB0505-24	2.5 x 5	5	3 gpm	24
CB1005-24	2.5 x 10	5	6 gpm	24
CB2005-24	2.5 x 20	5	12 gpm	24
CBJ1005-9	4.5 x 10	5	8 gpm	9
CBJ2005-9	4.5 x 20	5	16 gpm	9

Specialty Cartridges



Heavy Metals Cartridge

- Replacement cartridge for the ARS-1 & HMX-1
- Maximum temperature 100°F
- Non-leaching material for safe disposal

Part Number	Size D x L	Case Qty
HMRC10	2.5 x 10	1



Nitrate Cartridge

- Replacement cartridge for the NRS-1
- Maximum temperature 100°F
- Reduces nitrates

Part Number	Size D x L	Case Qty
NRC10	2.5 x 10	1

Replacement Packages for Drinking Water Systems

Part Number	Used with Sterling RO System	Filters Included
ROCP-B	DWSB-TFC-50, DWSB-50-PUMP, DWSB-50-PermPump	PB1005 Poly-Bonded Sediment Filter GAC10 Granular Activated Carbon Filter CB1005 Carbon Block Filter IC10Q, IC10T Inline Post Carbon Filter
ROQC-B	QCRO-50 QCRO-50-PUMP	QCF-S Sediment Filter QCF-GAC Granular Activated Carbon Filter QCF-CB Carbon Block Filter IC10Q Inline Post Carbon Filter
ROCRS-B	CRS-3	QCF-S Sediment Filter QCF-CB Carbon Block Filter QCF-UF UF Membrane Filter



Drinking Water
And
Whole House

STERLING

WATER TREATMENT

Cartridge Filter Housings



Drinking Water Systems

...THE NEXT GENERATION



3/4" Filter Housings

HC34

Wrench	O-Ring	Bracket
WR-HC	OR-HC	BRK-HC

- 3/4" inlet/outlet housing
- Includes: wrench & pressure relief
- Whole house applications
- Accepts 2-1/2" x 10" cartridges
- Max Flow: 8 gpm
- Maximum pressure: 60 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

HW34

Wrench	O-Ring	Bracket
WR300	ORVH	BRK-1020

- 3/4" inlet/outlet housing
- Includes: wrench & pressure relief
- Whole house applications
- Accepts 2-1/2" x 10" cartridges
- Max Flow: 8 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

VHC34

Wrench	O-Ring	Bracket
WR-VHC	OR-VHC	BRK-VHC

- Valve-in-head 3/4" inlet/outlet
- Includes: wrench
- Turning the valve closes both inlet & outlet and relieves the pressure simultaneously
- Accepts 2-1/2" x 10" cartridges
- Max Flow: 6 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

Wrench	O-Ring	Bracket
WR400	OR3420-CLEAR	BRK-1020

HL34

Wrench	O-Ring	Bracket
WR400	OR3420	BRK-1020

- 3/4" inlet/outlet housing
- Includes: wrench & pressure relief
- White sump
- Accepts 2-1/2" x 20" cartridges
- Max Flow: 15 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

HOT34

Wrench	O-Ring	Bracket
WR300	OR3420	BRK-1020

- 3/4" inlet/outlet hot water housing
- Includes: wrench & pressure relief
- Max Flow: 8 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 175°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

1/4" Filter Housings



USH05

Wrench	O-Ring
WR200	ORUSH

- 1/4" inlet/outlet housing
- Includes: 3/8" adapters, bracket & wrench
- Ideal for single faucet installations
- Accepts 2-1/2" x 5" cartridges
- Max Flow: 3 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed



USH10

Wrench	O-Ring
WR200	ORUSH

- 1/4" inlet/outlet housing
- Includes: 3/8" adapters, bracket & wrench
- Ideal for single faucet installations
- Accepts 2-1/2" x 10" cartridges
- Max Flow: 3 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

1" High Flow Filter Housings



HJ10-1

Wrench	O-Ring	Bracket
WR500	ORBB	BRK-J

- 1" inlet/outlet housing
- Includes: wrench & pressure relief
- White sump
- Suitable for high flow applications
- Accepts 4-1/2" x 10" cartridges
- Max Flow: 25 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed



HJ10-CLEAR

Wrench	O-Ring	Bracket
WR500	ORBB-CLEAR	BRK-J

- 1" inlet/outlet housing
- Includes: wrench & pressure relief
- Clear sump
- Suitable for high flow applications
- Accepts 4-1/2" x 10" cartridges
- Max Flow: 25 gpm
- Maximum pressure: 80 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed



HJ20-1

Wrench	O-Ring	Bracket
WR500	ORBB	BRK-J

- 1" inlet/outlet housing
- Includes: wrench & pressure relief
- White sump
- Suitable for high flow applications
- Accepts 4-1/2" x 20" cartridges
- Max Flow: 35 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed



HJ20-CLEAR

Wrench	O-Ring	Bracket
WR500	ORBB-CLEAR	BRK-J

- 1" inlet/outlet housing
- Includes: wrench & pressure relief
- Clear sump
- Suitable for high flow applications
- Accepts 4-1/2" x 20" cartridges
- Max Flow: 35 gpm
- Maximum pressure: 80 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

1.5" High Flow Filter Housings



HJ10-15

Wrench	O-Ring	Bracket
WR500	ORBB	BRK-J

- 1.5" inlet/outlet housing
- Includes: wrench & pressure relief
- White sump
- Suitable for high flow applications
- Accepts 4-1/2" x 10" cartridges
- Max Flow: 25 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed



HJ20-15

Wrench	O-Ring	Bracket
WR500	ORBB	BRK-J

- 1.5" inlet/outlet housing
- Includes: wrench & pressure relief
- White sump
- Suitable for high flow applications
- Accepts 4-1/2" x 20" cartridges
- Max Flow: 35 gpm
- Maximum pressure: 100 psi
- Maximum temperature: 100°F

NOTE: Flow rate will vary greatly depending on cartridge filter installed

Drinking Water Systems

Reverse Osmosis Systems



DWSB-TFC-50

5 Stage Reverse Osmosis System

5 Micron Sediment, GAC, Carbon Block, 50 gpd Membrane, and GAC post filter.



QCRO-50

5 Stage Reverse Osmosis System

Sanitary Quick Change Cartridges. Fast & Simple cartridge replacement.



CRS-3

Cyst, Virus & Chemical Reduction System



Q1-CB1

Sanitary Quick Change Carbon Block



Q1-SR1

Sanitary Quick Change Scale Inhibitor & Carbon



S500SS

Scale Inhibitor System



RO-LSV

Leak Detector Stop Valve

Specialty Systems



HMX-1

Heavy Metals Reduction System

With metered auto shut-off



NRS-1

Nitrate Reduction System

With metered auto shut-off



DWSB-50-PermPump

4 Stage Reverse Osmosis System

Permeate Pump for higher line pressure and increased volume output.



QCRO-50-PUMP

5 Stage Reverse Osmosis System

Quiet booster pump increases water pressure to improve water quality and quantity.




- *Validated Performance*
- *Independently Certified for Primary Disinfection*



PRODUCT FEATURES

- Class A UV systems independently validated and certified.
- With a higher wattage output than standard or class B UV's, these class A systems are rated for primary level contamination.
- True 254nm Teflon® based UV sensor measures continuously, displaying UV intensity as a % – standard on UVL-8-A / UVL-18-A units ONLY.
- Colored screen controller displays diagnostics, current system status and system warnings.
- Expandability port for future upgrades and options.
- Axial flow, stainless steel polished reactors, designed & manufactured to ASME pressure vessel standards.
- Simple lamp changes.
- Reliable, industry proven, proprietary low pressure coated UV lamps with ceramic bases for durability and long life.

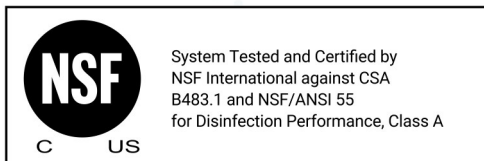

CONDITIONS FOR USE

Your system will provide years of use provided the system is maintained on a regular basis as per the specifications outlined in the Owner's Manual. For the system to perform as tested, the following water quality parameters must be met.

PARAMETER	LEVEL
Hardness	< 7 gpg
Iron (Fe)	< 0.3 ppm
Manganese (Mn)	< 0.05 ppm
Tannins	< 0.1 ppm
Turbidity	< 1 NTU
Transmittance	< 75% UTV

For levels outside those specified in the table above, please contact the factory for further technical assistance.



NSF STANDARD 55, CLASS A—EQUIPMENT SPECIFICATIONS

MODEL	UVL-8-A	UVL-18-A
NSF Class A Flow Rate (40mJ/cm ² @ 70% UTV)	7.9 GPM	18.0 GPM
	1.79 m ³ /hr	4.08 m ³ /hr
Flow Restrictor	Integral	
Port Size	1"MNPT	1 ½"MNPT
Electrical	110 v/50-60HZ	
Lamp Watts	67	101
Power (Watts)	73 (72 @ 230V)	115 (108 @ 230V)
Maximum Current (amps)	1	1
Replacement Lamp	RL-600HO	RL-950HO
Replacement Sleeve	RQ-600	RQ950
Replacement UV Sensor	RSHO-B3.5V	RSHO-B3.5V
Chamber Material	Polished 316L Stainless Steel, A249 pressure rated tubing	
Reactor Dimensions	3.5" x 26.9"	3.5" x 40.7"
Controller Dimensions	8.6" x 4.2" x 4"	
Operating Pressure	10-150 psi	
Operating Water Temp.	36-104°F	
UV Monitor	YES	
Shipping Weight	16.1 lbs	21.6 lbs.

Lamp Life:

UV lamps are rated for 9000 hours (10000 hours for all LBH6 systems) of continuous use (one-year of operation).

General Operation and Maintenance:

UV lamps are to be replaced on an annual basis (9000 hours for UVL-8-A systems and 10000 hours for UVL-18-A systems). Quartz sleeves and UV sensors are to be cleaned every 6-12 months and replaced every 5 yrs.

This Class A system conforms to NSF/ANSI 55 for the disinfection of microbiologically contaminated water that meets all other public health standards. The system is not intended to convert wastewater or raw sewage to drinking water. The system is intended to be installed on visually clear water.

NSF/ANSI 55 defines wastewater to include human and/or animal body waste, toilet paper, and any other material intended to be deposited in a receptacle designed to receive urine and/or feces (blackwater), and other waste materials deposited in plumbing fixtures (greywater).

If this system is used for the treatment of untreated surface waters or ground water under the direct influence of surface water, a device found to be in conformance for cyst reduction under the appropriate NSF/ANSI standard shall be installed upstream of the system.

While testing was performed under standard laboratory conditions, actual performance may vary.

The systems and installation shall comply with applicable provincial/state and local regulations.





Intended for easy installation, a UVL system can be installed on the home's main water line at the point-of-entry, treating all the water coming into the home. These systems sterilize bacteria, preventing its growth and helping protect a home's incoming water supply.



PRODUCT FEATURES

- 10 and 15 gpm axial flow system.
- 304 SS LPHO-based system
- Integral lamp life monitor, with both audible and visual indication of lamp life.
- Reliable, industry proven, proprietary low pressure coated UV lamps with ceramic bases for durability and long life.
- Constant current electronic controller in a splash proof case.
- 110V/50Hz.



EQUIPMENT SPECIFICATIONS

MODEL	UVL-10	UVL-15
Flow Rate (30mJ/cm ² @ 95% UTV)	10 GPM	15 GPM
Port Size	1" MNPT	
Electrical	90-265v/50-60Hz	
Plug Type	Nema 5-15	
Lamp (Watts)	34	45
Power (Watts)	38	57
Maximum Current (amps)	1	1
Replacement Lamp	UVL-10-LAMP	UVL-15-LAMP
Replacement Sleeve	UVL-10-QS	UVL-15-QS
Replacement Controller	UVL-10-15-BALL	
Chamber Material	Polished 304 Stainless Steel, A249 pressure rated tubing	
Reactor Dimensions	3.5" x 16.5"	3.5" x 20.0"
Controller Dimensions	8.6" x 4.2" x 4"	
Operating Pressure	0.7-10.3 bar (10-150 psi)	
Operating Water Temp.	36-104°F	
Visual Lamp Out Indicator	YES	
Shipping Weight	11.9 lbs	13.2 lbs.

CONDITIONS FOR USE

Your system will provide years of use provided the system is maintained on a regular basis as per the specifications outlined in the Owner's Manual. For the system to perform as tested, the following water quality parameters must be met.

PARAMETER	LEVEL
Hardness	< 120 mg/L (ppm)
Iron (Fe)	< 0.3 mg/L (ppm)
Manganese (Mn)	< 0.05 mg/L (ppm)
Tannins	< 0.1 mg/L (ppm)
Turbidity	< 1 NTU
Transmittance	< 75% UTV

For levels outside those specified in the table above, please contact the factory for further technical assistance.





STERLING

WATER TREATMENT

IX Series



SWS1 Series




PWS1 Series



Available Features

Available Features	IX Series	SWS1 Series	PWS1 Series
High Flow	✓	✓	✓
HE Compatible	✓	✓	✓
Extensive History & Usage Info	✓	✓	✓
1"-1 1/4" Plumbing Capable	✓	✓	✓
Proprietary	✗	✓	✓
Adjustable Cycle Times	✗	✓	✓
Adjustable Cycle Sequencing	✗	✗	✓
Remote Start	✗	✗	✓
Contractor Contact Info Displayed	✗	✗	✓
CI Generator Compatible	✗	✗	✓
MAV Valve Capable	✗	✗	✓
Auxiliary Relays	✗	✗	✓
Backlight Display	✗	✗	✓
Ozone Generator Capable	✗	✗	✓
AIO Capable	✗	✗	✓



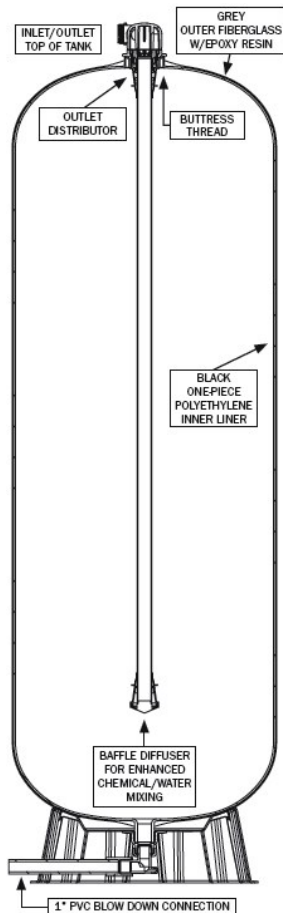

FEATURES:

- Convenient Inlet/Outlet piping connection at the top of the tank.
- Inlet/Outlet Adapter easily accommodates the use of a vacuum breaker.
- Inlet/Outlet Buttress thread for strength.
- Bypass valve option available.
- Full 1" blow down drain at lowest part of tank.
- 360° degree drain orientation.
- Black one piece polyethylene liner for impact and corrosion resistance.
- 5 year limited warranty.
- Made from NSF listed and/or compliant materials.

SPECIFICATIONS:

- Maximum Operating Pressure 75 psi/517 kPa
- Maximum Operating Temperature 120°F 49°C

Model Number	Volume (gal)	Tank Assembly Diameter (in)	Tank Assembly Height (in)	Shipping Weight (lbs)
RT80	80	21"	67.5"	66
RT120	120	24"	78.5"	80

FITTINGS INCLUDED:

1 1/4" x 1 1/2" PVC Straight Solvent Fitting Kit and
1 1/4" Plastic Straight Male NPT Fittings

